

SLV Profishop
EXPERIENCE LIGHT

powered by



SLVtec[®] 2025

SLV TECHNICAL LIGHTING CATALOGUE



STAY WELL-INFORMED

Scan the QR code and stay up to date.
Visit us at www.profishop.online

EASY TO INSTALL EFFICIENT MULTIFUNCTIONAL

EDITORIAL

TECHNOLOGY THAT MAKES
THE DIFFERENCE [06](#)

INDOOR

EASYLIGHT [06](#)

RETRO [16](#)

PANEL [26](#)

PAVANNO [34](#)

TRACKSPOT [38](#)

DOWNLIGHT [48](#)

UNIVERSAL DOWNLIGHT [56](#)

SURFACE [60](#)

BATTEN [64](#)

WATERPROOF [70](#)

HIGHBAY [82](#)

OUTDOOR

BULKHEAD [88](#)

FLOODLIGHT [92](#)




TECHNOLOGY THAT MAKES THE DIFFERENCE

As a reliable partner for electrical installers and the trade, we are constantly developing our product range – practical, future-oriented and with a clear focus on your day-to-day challenges. With **SLVtec®** we have created an independent brand dedicated entirely to the development of technical, functional and energy-efficient lighting solutions.

SLVtec® stands for uncompromising quality, innovative product features, high availability as well as quick and easy installation. Whether new build, modernisation or special application: with SLVtec® you can master any project confidently and efficiently.

FOLLOW THE BLUE STAR – THE NEW SLVtec® PRODUCT WORLD

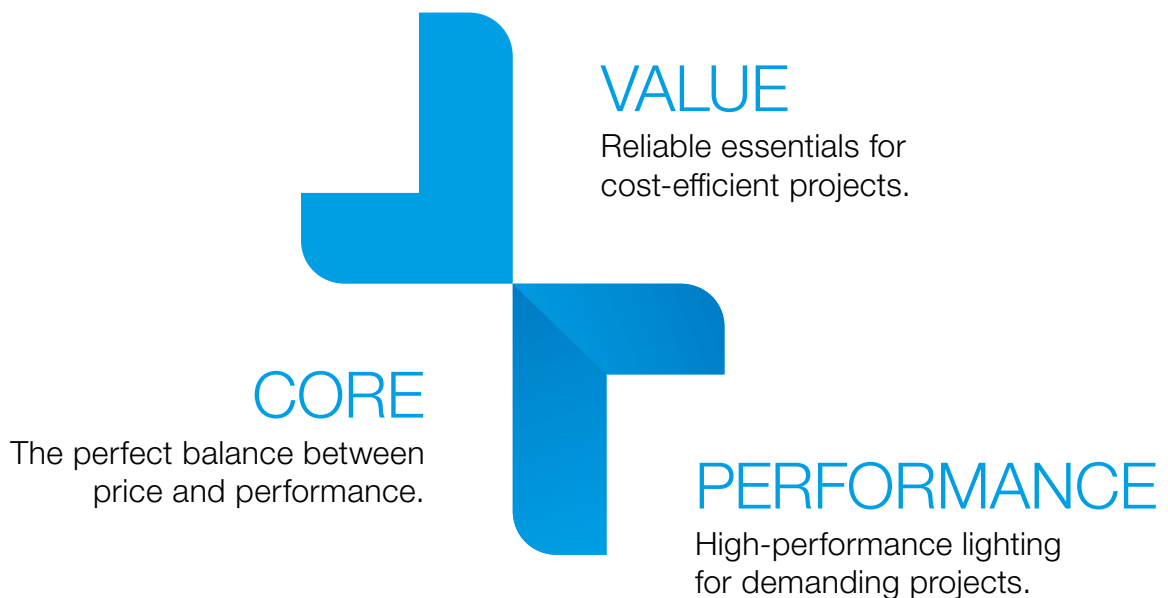

THREE PERFORMANCE CLASSES. COUNTLESS POSSIBILITIES. ONE ANSWER: SLVtec®.

Whether you are looking for cost-efficient basic lighting, the ideal balance between price and performance or sophisticated lighting solutions: SLVtec® has the right answer for you. All our products combine innovative technology, efficient light output and versatile applications for professionals who rely on function and quality every day.



EASY TO INSTALL, EFFICIENT AND MULTIFUNCTIONAL

The efficiency of modern technology is evident in the details. Our products not only offer excellent lighting quality, but also sophisticated features that make your daily work easier.

Easy to install: Intelligent mounting systems, tool-free cabling and innovative quick-release connectors make installation quick and easy, saving time and effort.

Outstanding energy efficiency: The majority of our products achieve a luminous efficiency of more than 120 lm/W.

Multifunctionality: With Multi-Colour and Multi-Lumen options, our lighting solutions can be tailored to suit your needs and are flexible to use.

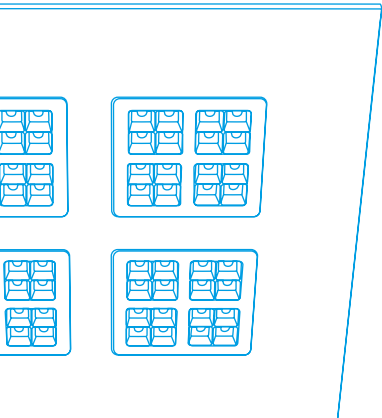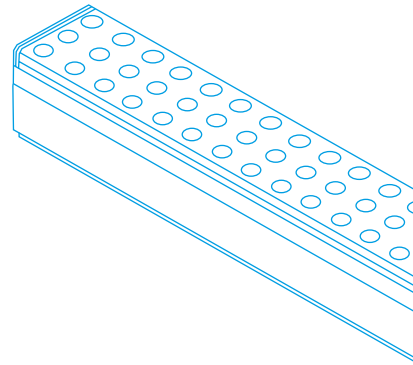


CUSTOMISED LIGHTING SOLUTIONS TO ORDER

In addition to our widely available stock programme, we also offer selected products designed specifically for specific projects. These items are available to order only – perfect for custom lighting designs and bespoke applications.

NO CHALLENGE IS TOO GREAT – SLVtec® PROVIDES THE SOLUTION

Standard or custom: discover our new portfolio and follow the blue star into a world of innovative technical lighting solutions. Your next project starts here – contact us!

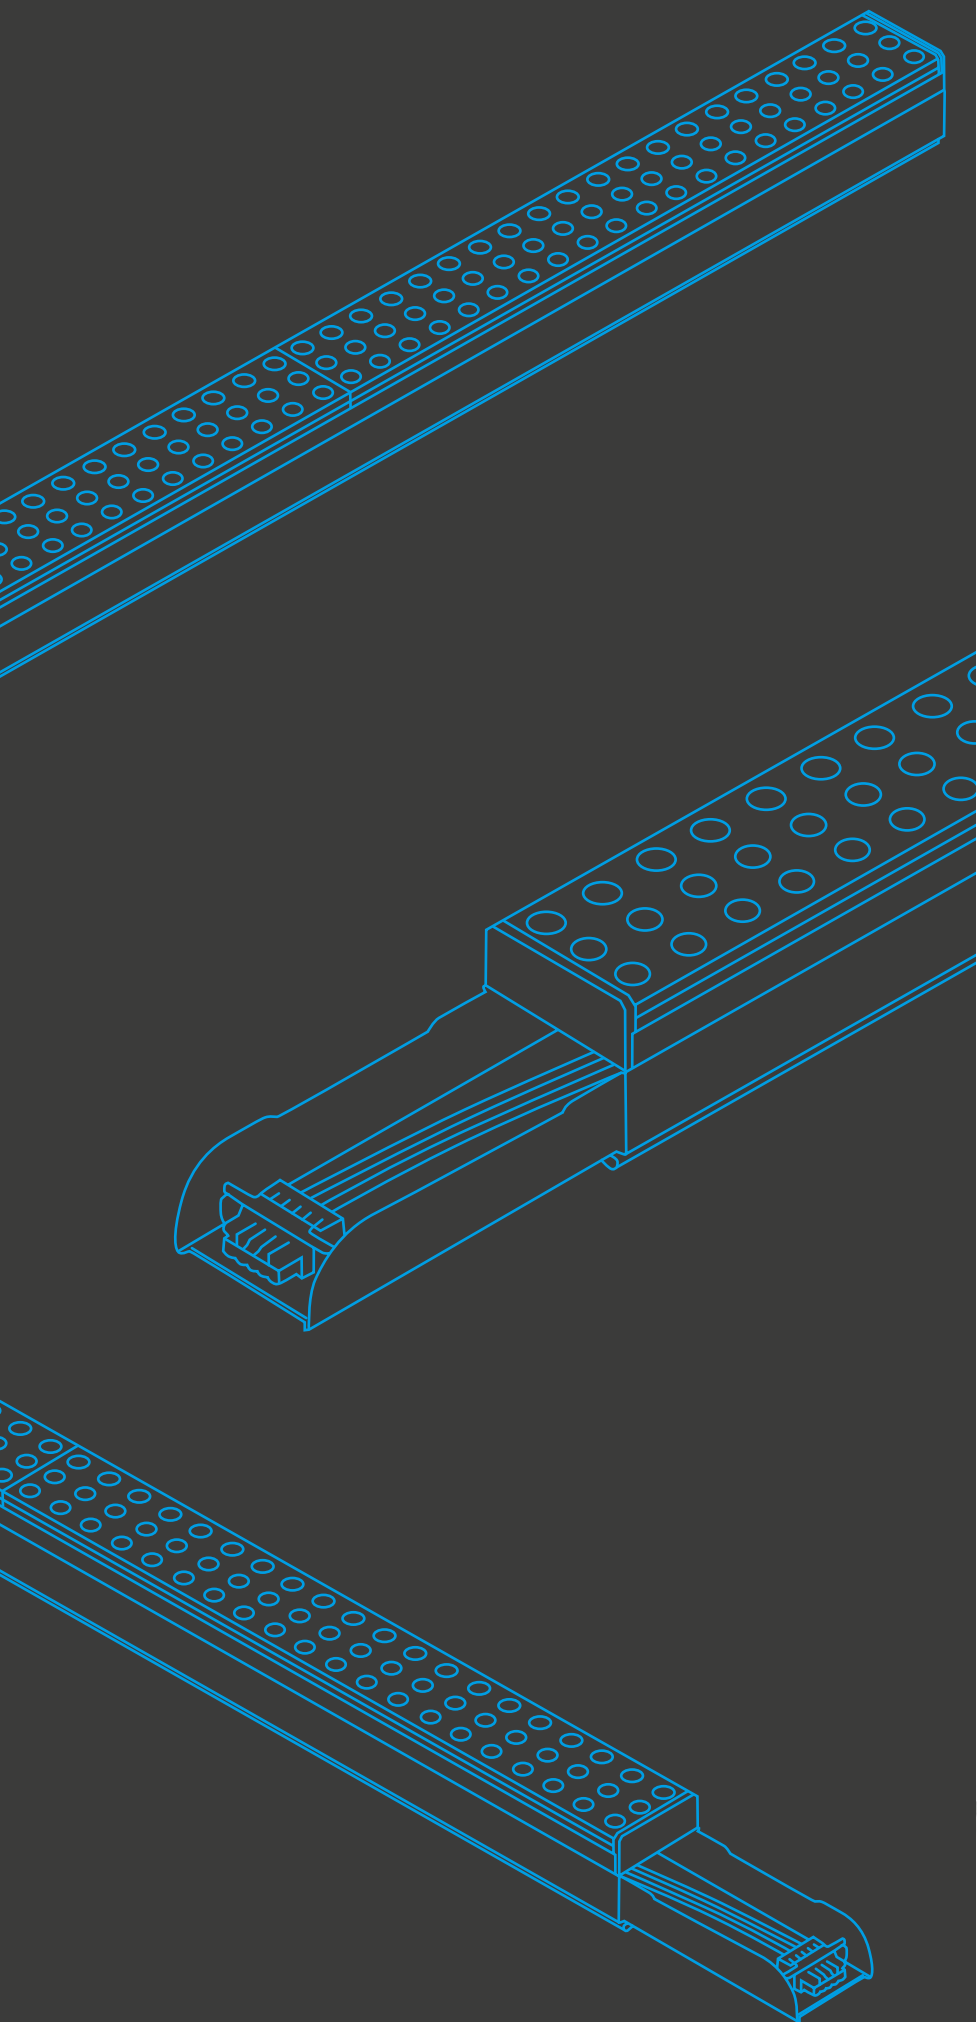

COMBINE



EASYLIGHT

+



accessories for different
types of mounting:
surface-mounted, cable
or chain suspension

=



EASYLIGHT

PRODUCT ADVANTAGES

High energy savings thanks to an **efficiency of up to 200 lm/W**

Service life up to **100,000 hours**

in five different beam angles. Other beam angles are available on request

EASY TO INSTALL thanks to tool-free assembly

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**


DALI dimmable and **DC-capable**

**MULTI
LUMEN** **MULTI
COLOR**

up to
200 lm/W


BEAM ANGLE

WB

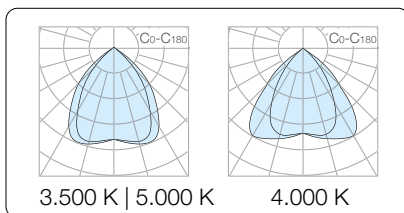


Wide light distribution for open areas such as supermarkets, logistics areas and showrooms. Ideal for uniform ambient lighting.

DA30

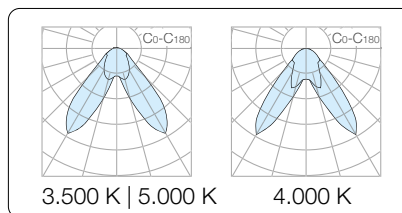


Asymmetrical, laterally directed light distribution for targeted illumination of wall surfaces, shelves or presentation zones – ideal for supermarkets or display areas.

MB

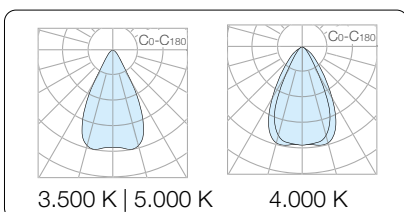


Balanced light distribution for production areas and workshops where uniform and efficient illumination over a medium width is required.

NB

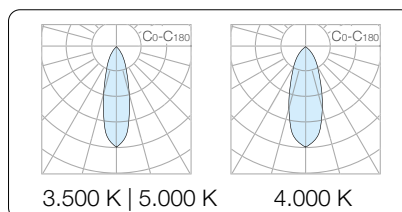

Focused light distribution for targeted illumination of high aisles or storage areas with narrow geometries – particularly effective at great heights.

Oval

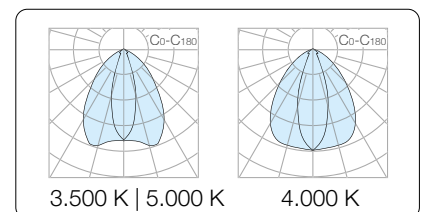

Elongated light distribution for corridors, hallways and busy areas – optimised for linear room geometries with uniform light distribution.

Other beam angles are available on request

EASYLIGHT

Efficient. Flexible. Systematic.

From industrial halls to supermarkets and logistics centres: EASYLIGHT is the high performance LED continuous-row lighting system for applications where flexibility, efficiency and reliability are required.

With an impressive efficiency of up to 200 lm/W, EASYLIGHT provides energy- and cost efficient lighting. Thanks to the innovative quick-fit system, EASYLIGHT can be installed in next to no time, significantly reducing your project times. The sophisticated design fits seamlessly into a wide range of applications. And with a service life of up to 100,000 hours, EASYLIGHT not only reduces maintenance costs, but also your operating costs in the long term.

EASYLIGHT AT A GLANCE

Up to 200 lm/W – particularly energy-efficient

Tool-free assembly – save time and effort


Power and CCT switch – adjustable system output and light colour

All variants are DC-capable – controllable and future-proof

Various beam angles, lengths and mounting types – can be flexibly combined

Seamless connection – continuous light line


EASY TO INSTALL

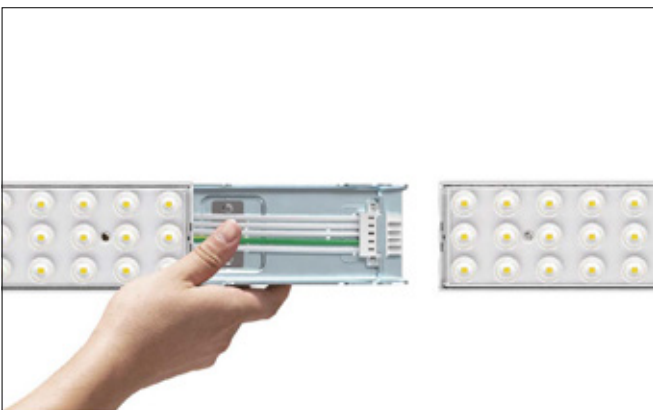

Quick, tool-free installation – electrical and mechanical connection of modules and lighting units in a single step.



Chain or cable suspension is equally quick and tool-free, for flexible adaptation to a wide range of building situations.

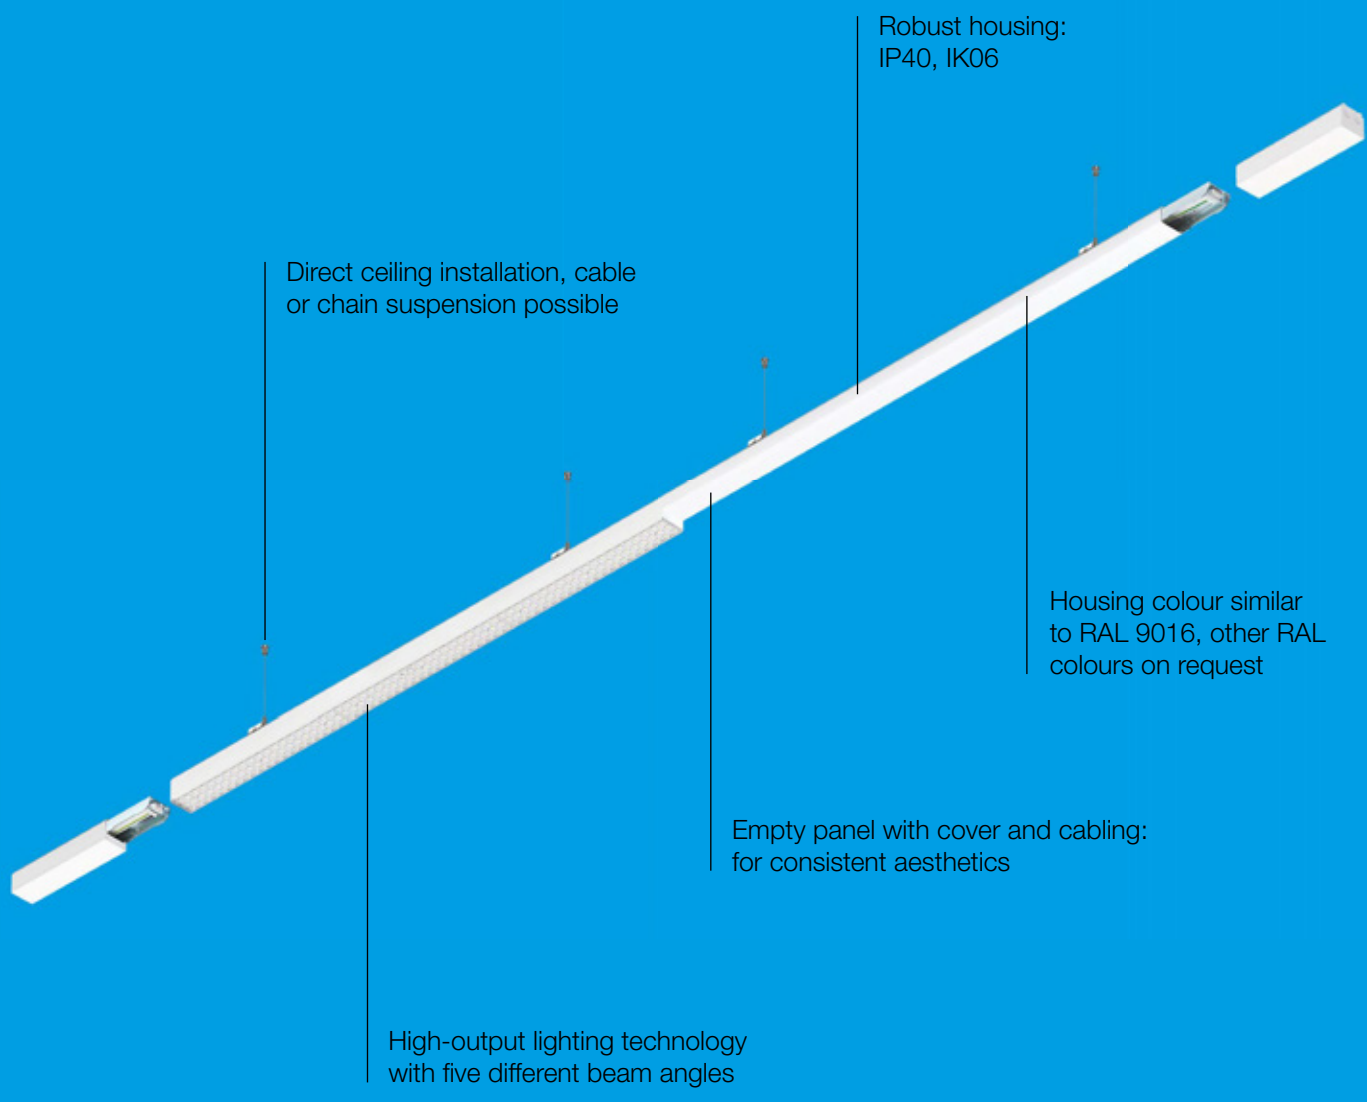


Robust housing:
IP40, IK06

Direct ceiling installation, cable
or chain suspension possible

Housing colour similar
to RAL 9016, other RAL
colours on request

Empty panel with cover and cabling:
for consistent aesthetics

High-output lighting technology
with five different beam angles

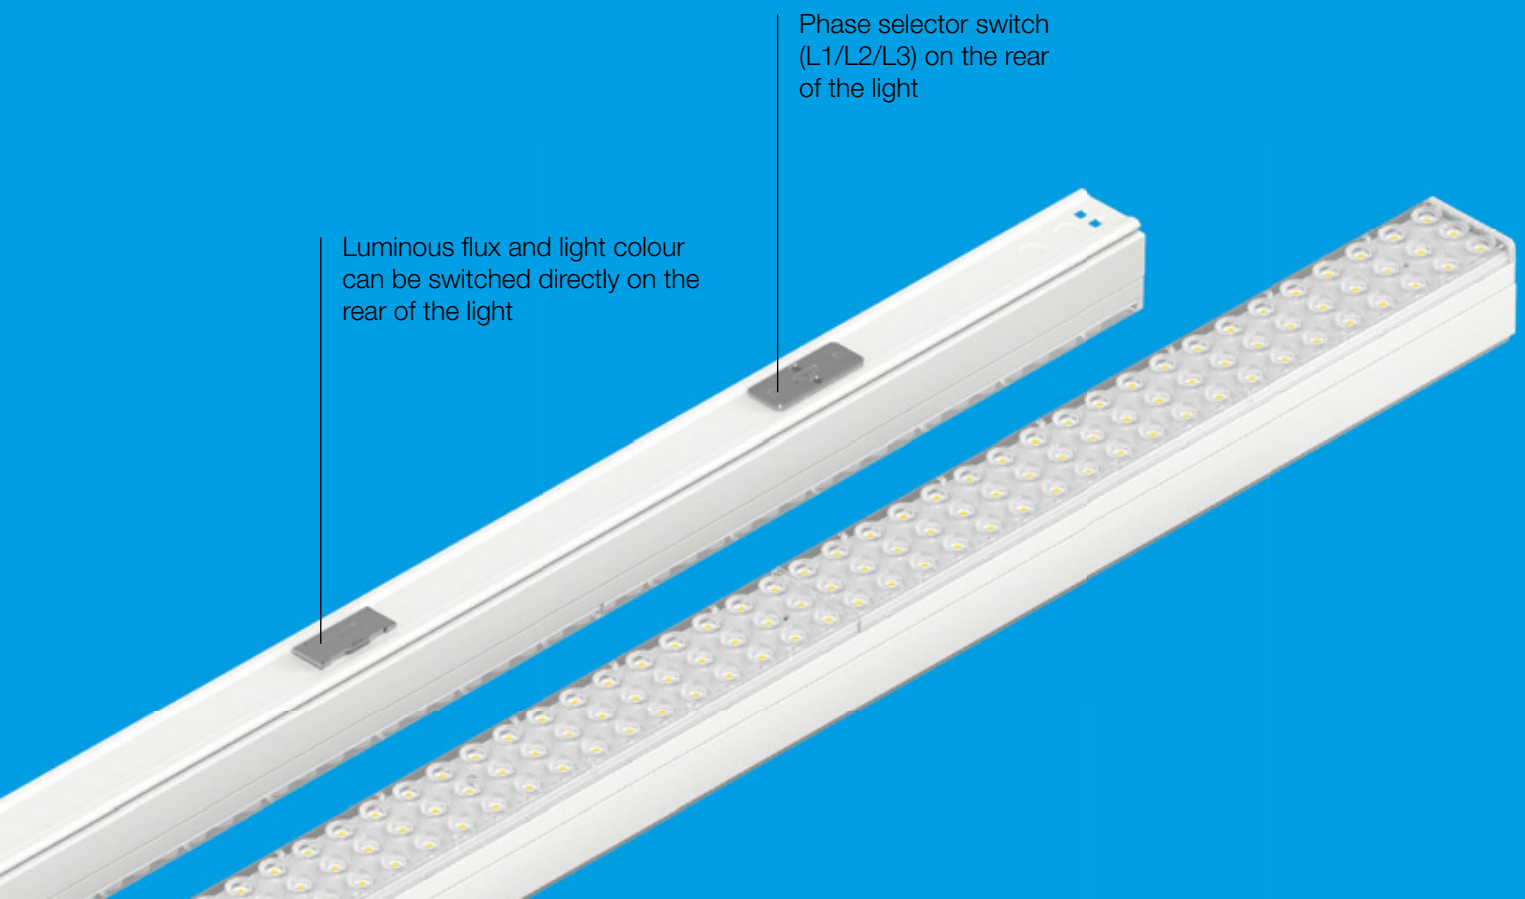

Phase selector switch
(L1/L2/L3) on the rear
of the light

Luminous flux and light colour
can be switched directly on the
rear of the light

EASYLIGHT

INDOOR




EASYLIGHT



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
EASYLIGHT 1500 135 835/840/850 WB WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 NB WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 MB WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 OVAL WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 DA30 WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 WB ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 NB ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 MB ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 OVAL ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 DA30 ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	S	1009207	200.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	O	1009208	200.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	S	1009209	200.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	S	1009210	200.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	O	1009211	200.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	S	1009212	250.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	O	1009213	250.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	S	1009214	250.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	S	1009215	250.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	O	1009216	250.00

EASYLIGHT

INDOOR



EASYLIGHT





MULTI LUMEN **MULTI COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
EASYLIGHT 2500 140 835/840/850 WB WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 NB WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 MB WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 OVAL WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 DA30 WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 WB WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 NB WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 MB WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 OVAL WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 DA30 WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	4,6 kg	On / Off	✓	S	1009217	320.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	4,6 kg	On / Off	✓	O	1009218	320.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	4,6 kg	On / Off	✓	S	1009219	320.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	4,6 kg	On / Off	✓	S	1009220	320.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	4,6 kg	On / Off	✓	O	1009221	320.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	4,6 kg	DALI	✓	S	1009222	370.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	4,6 kg	DALI	✓	O	1009223	370.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	4,6 kg	DALI	✓	S	1009224	370.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	4,6 kg	DALI	✓	S	1009225	370.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	4,6 kg	DALI	✓	O	1009226	370.00

EASYLIGHT

INDOOR



L x W x H (mm):
300 x 65 x 60



L x W x H (mm):
300 x 65 x 60



L x W x H (mm):
436 x 65 x 60



L x W x H (mm):
436 x 65 x 60

Product designation	Colour	Availability*	Prod no.	EUR
EASYLIGHT FIB 300 5 25 WH	○	S	1009230	45.00
EASYLIGHT FIB 300 7 25 WH	○	S	1009231	45.00
EASYLIGHT FOB 300 5 25 WH	○	S	1009232	55.00
EASYLIGHT FOB 300 7 25 WH	○	S	1009233	65.00



L x W x H (mm):
1.500 x 65 x 42

L x W x H (mm):
2.500 x 65 x 42

L x W x H (mm):
4.500 x 65 x 42

W x H (mm):
65 x 60


Product designation	Colour	Availability*	Prod no.	EUR
EASYLIGHT BC 1500 5 25 WH	○	S	1009234	50.00
EASYLIGHT BC 1500 7 25 WH	○	S	1009235	58.00
EASYLIGHT BC 2500 5 25 WH	○	S	1009236	75.00
EASYLIGHT BC 2500 7 25 WH	○	S	1009237	85.00
EASYLIGHT BC 4500 5 25 WH	○	O	1009238	120.00
EASYLIGHT BC 4500 7 25 WH	○	O	1009239	135.00
EASYLIGHT EC WH	○	O	1009240	5.00

An extensive range of accessories, such as emergency lighting modules and spotlights, is available on request.

*S = in stock
O = to order



Product designation	Colour	Availability*	Prod no.	EUR
EASYLIGHT CSK	○	S	1009241	8.00
EASYLIGHT CSK FT	○	S	1009242	11.00
EASYLIGHT SCK 5000	○	O	1009247	18.00
EASYLIGHT SCF M6	○	S	1009244	7.00
EASYLIGHT SCF M10	○	S	1009245	7.00
EASYLIGHT STM	○	O	1009246	7.00

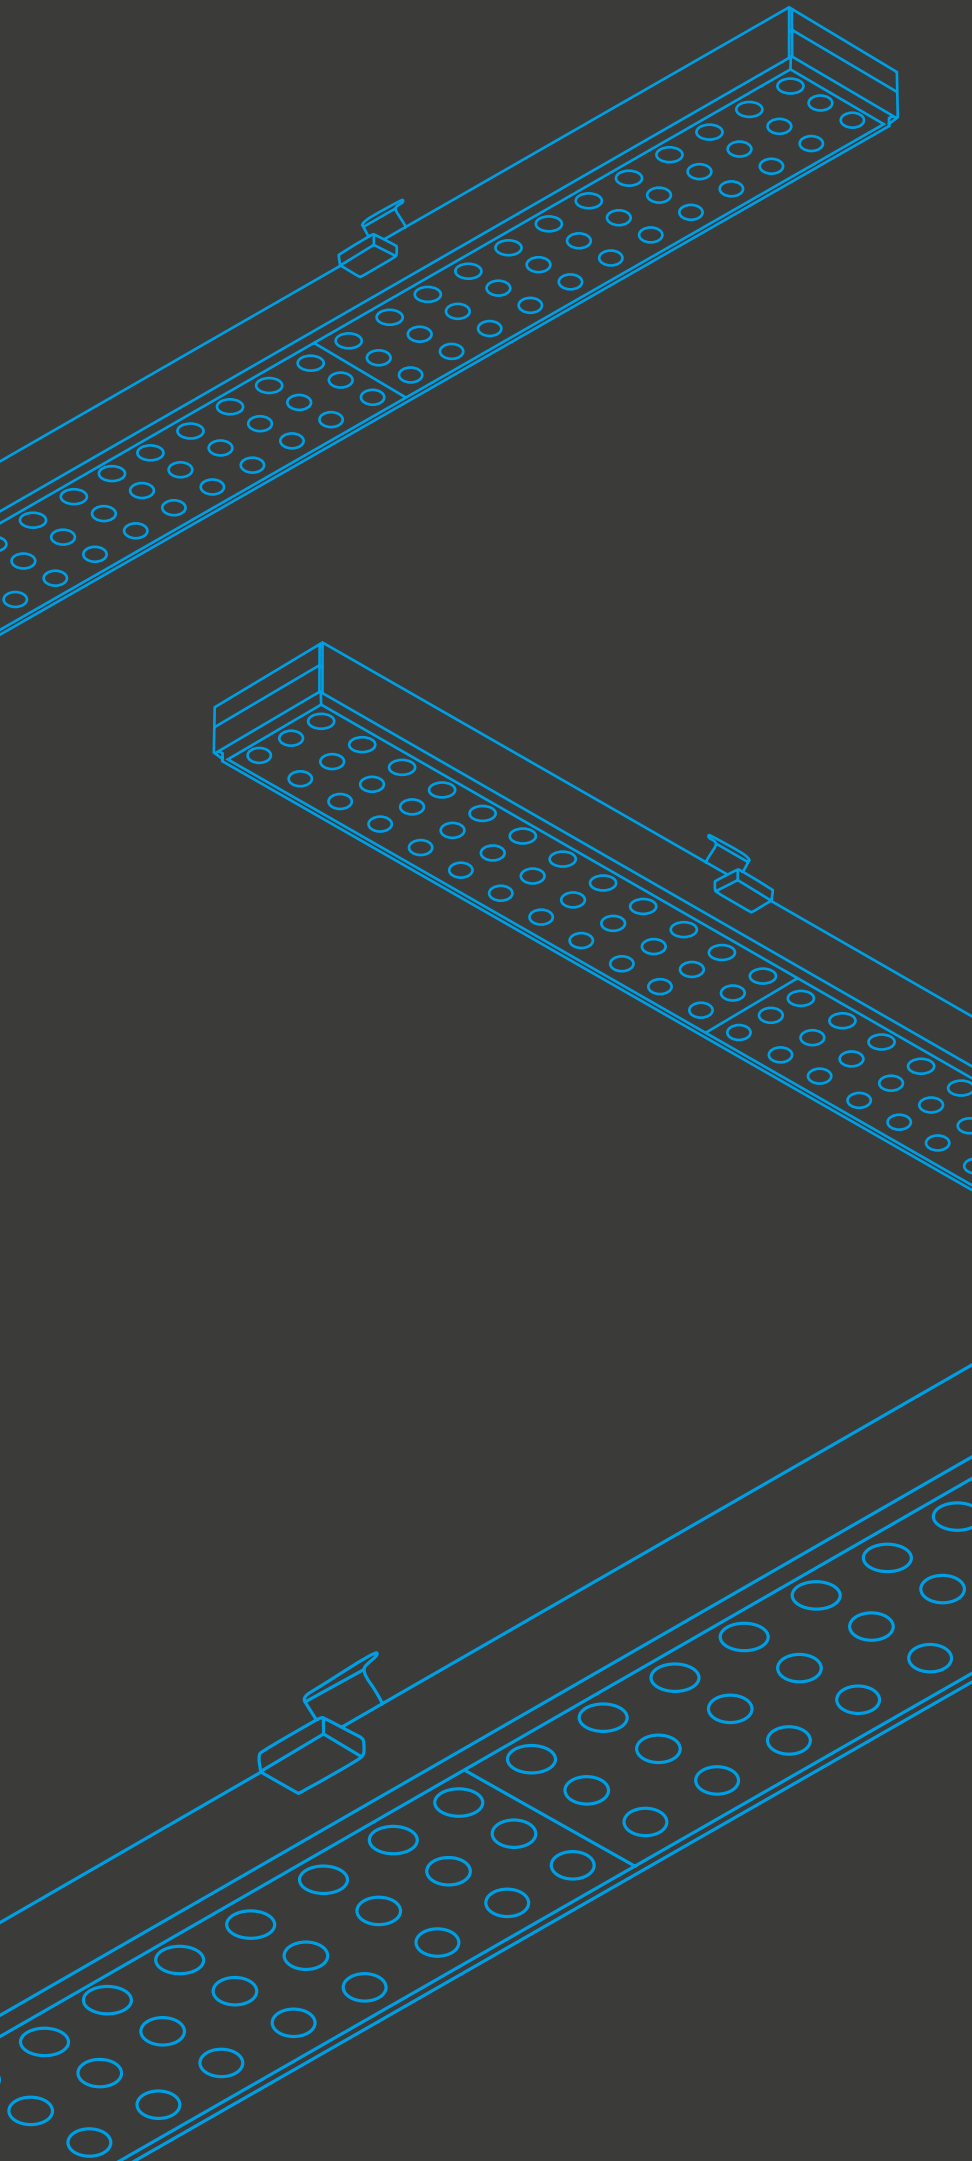

Simply remove the old light carrier and replace it with RETRO.

RETRO

PRODUCT ADVANTAGES

1:1 replacement of existing T8/T5 continuous-row systems in under 1 minute

Compatible with standard trunking from well-known manufacturers

High energy savings thanks to an **Efficiency of up to 190 lm/W**

Service life up to **100,000 hours**

EASY TO INSTALL Thanks to Click Design for tool-free installation

Flexibly customisable thanks to four different beam angles **Multi-Lumen** and **Multi-Colour**

DALI-dimmable and **DC-capable**

up to 190
lm/W


MULTI LUMEN **MULTI COLOR**




BEAM ANGLE



WB

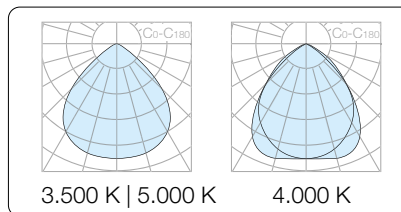


NB

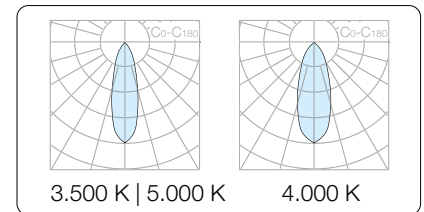


Wide light distribution for open areas such as supermarkets, logistics areas and showrooms. Ideal for uniform ambient lighting.

Focused light distribution for targeted illumination of high aisles or storage areas with narrow geometries – particularly effective at great heights.

MB

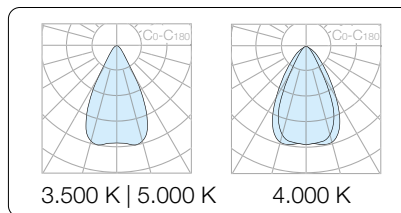

Oval

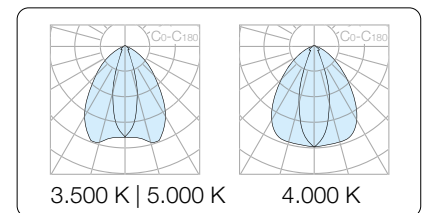

Balanced light distribution for production areas and workshops where uniform and efficient illumination over a medium width is required.

Elongated light distribution for corridors, hallways and busy areas – optimised for linear room geometries with uniform light distribution.

RETRO

The quickest way to modernise a lighting system.

The RETRO LED system was specially developed for quick and easy retrofitting of existing T8 and T5 continuous-row lighting systems. Thanks to the ingenious Click Design, replacement is possible in less than a minute - no tools or conversions required. The modules are compatible with a wide range of popular trunking systems and offer a significantly higher efficiency of up to 190 lm/W.

Output and light colour can be adjusted on site using the power and CCT switch for maximum project flexibility. Various beam angles, DALI options and a service life of up to 100,000 hours make RETRO the ideal solution for demanding modernisation projects in industry, retail and logistics.

RETRO AT A GLANCE

1:1 replacement for existing T8/T5 fluorescent lamps

Compatible with top brand trunking

Up to 190 lm/W luminous efficiency


Click assembly without tools


Integrated power and CCT switch

Various beam angles and lengths for maximum flexibility




1:1 SOLUTION

With the RETRO LED module, you can convert your existing trunking system to LED with no tools in just 44 seconds!



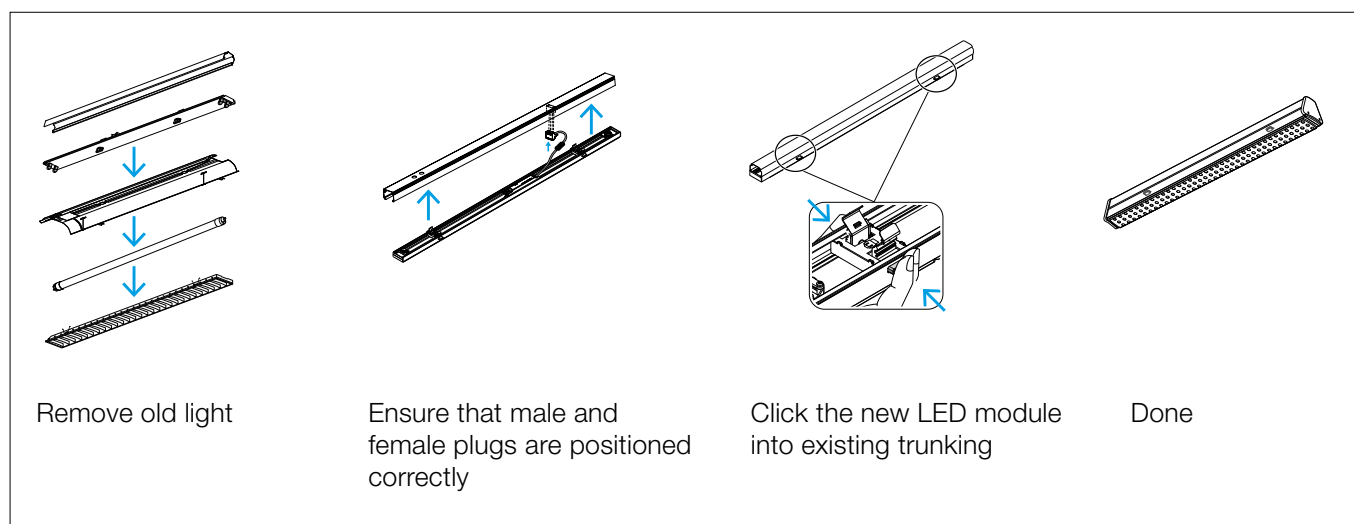


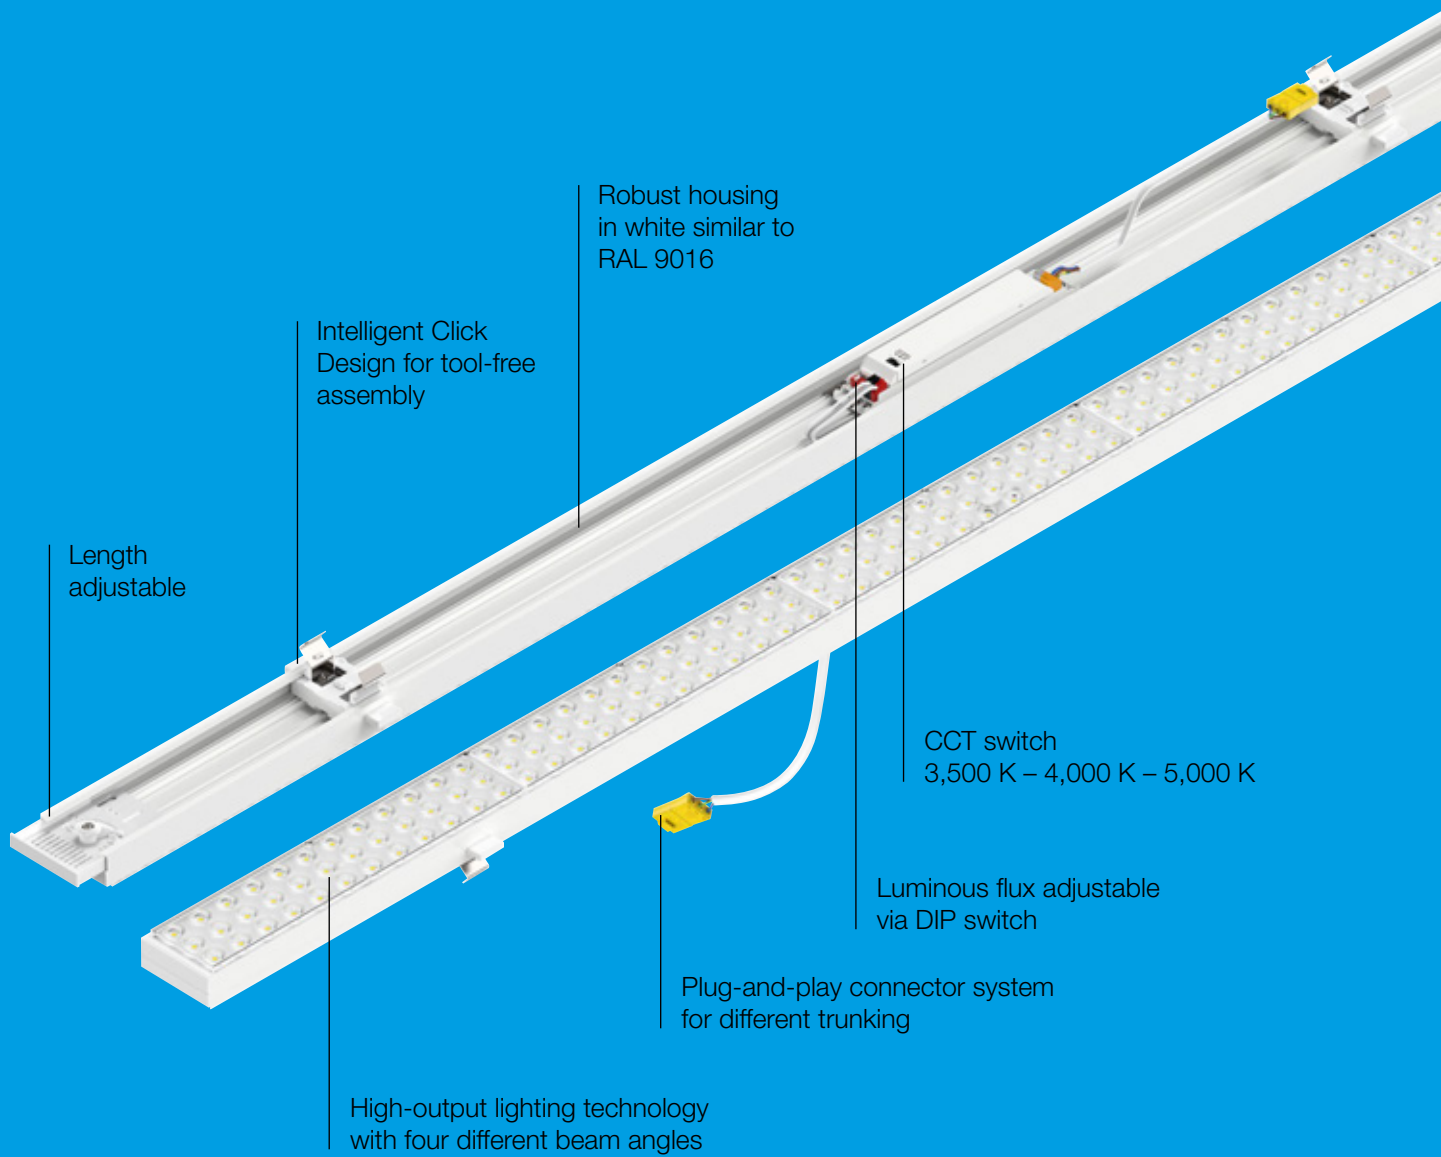

Easy adjustment to the desired length

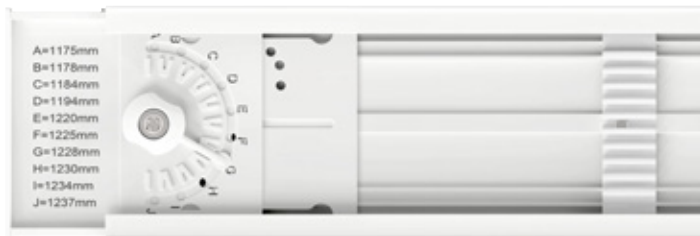

1175 mm to 1237 mm

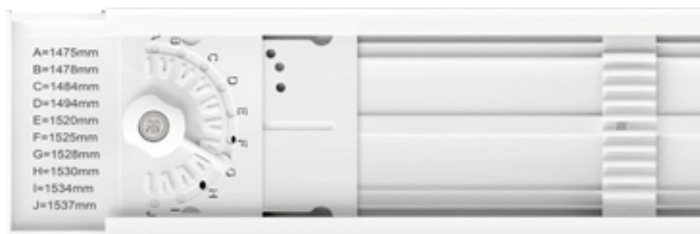

1475 mm to 1537 mm

RETRO

INDOOR



RETRO



**MULTI
LUMEN**




**MULTI
COLOR**



IP20

IK04

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
RETRO LT 1200 110 835/840/850 WB ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 110 835/840/850 MB ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 110 835/840/850 NB ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 110 835/840/850 OVAL ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 WB ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 MB ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 NB ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 OVAL ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K

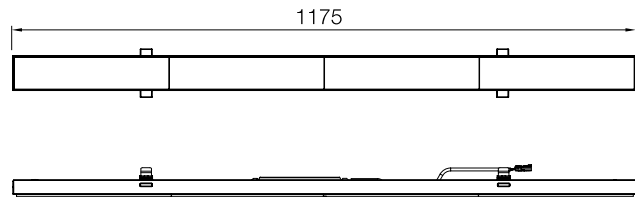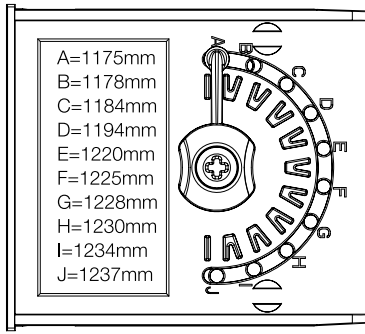*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009179	160.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009180	160.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009181	160.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009182	160.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009183	210.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009184	210.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009185	210.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009186	210.00

RETRO

INDOOR



RETRO



**MULTI
LUMEN**



**MULTI
COLOR**



IP20

IK04

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
RETRO LT 1500 135 835/840/850 WB ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 135 835/840/850 MB ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 135 835/840/850 NB ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 135 835/840/850 OVAL ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 WB ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 MB ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 NB ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 OVAL ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K

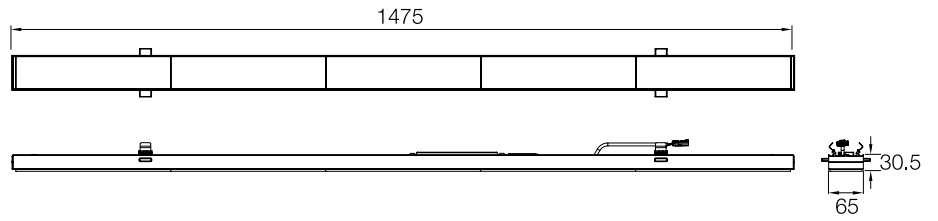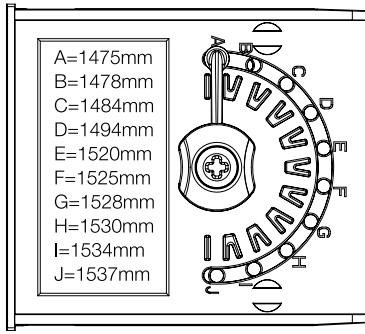*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009187	180.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009188	180.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009189	180.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009190	180.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009191	220.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009192	220.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009193	220.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009194	220.00

RETRO

INDOOR



CONNECTORS FOR ON / OFF


Product designation	Colour	Availability*	Prod no.	EUR
RETRO CON 3P001	○	S	1009195	17.00
RETRO CON 3P002	○	S	1009196	17.00
RETRO CON 3P003	○	S	1009197	17.00
RETRO CON 3P004	○	S	1009198	17.00
RETRO CON 3P005	○	S	1009199	17.00
RETRO CON 3P006	○	S	1009200	17.00
RETRO CON 3P007	○	S	1009201	17.00

*S = in stock
○ = to order



CONNECTORS FOR DALI

Product designation	Colour	Availability*	Prod no.	EUR
RETRO CON 5P101	○	○	1009202	22.00
RETRO CON 5P102	○	○	1009203	22.00
RETRO CON 5P103	○	○	1009204	22.00
RETRO CON 5P104	○	○	1009205	22.00
RETRO CON 5P105	○	○	1009206	22.00

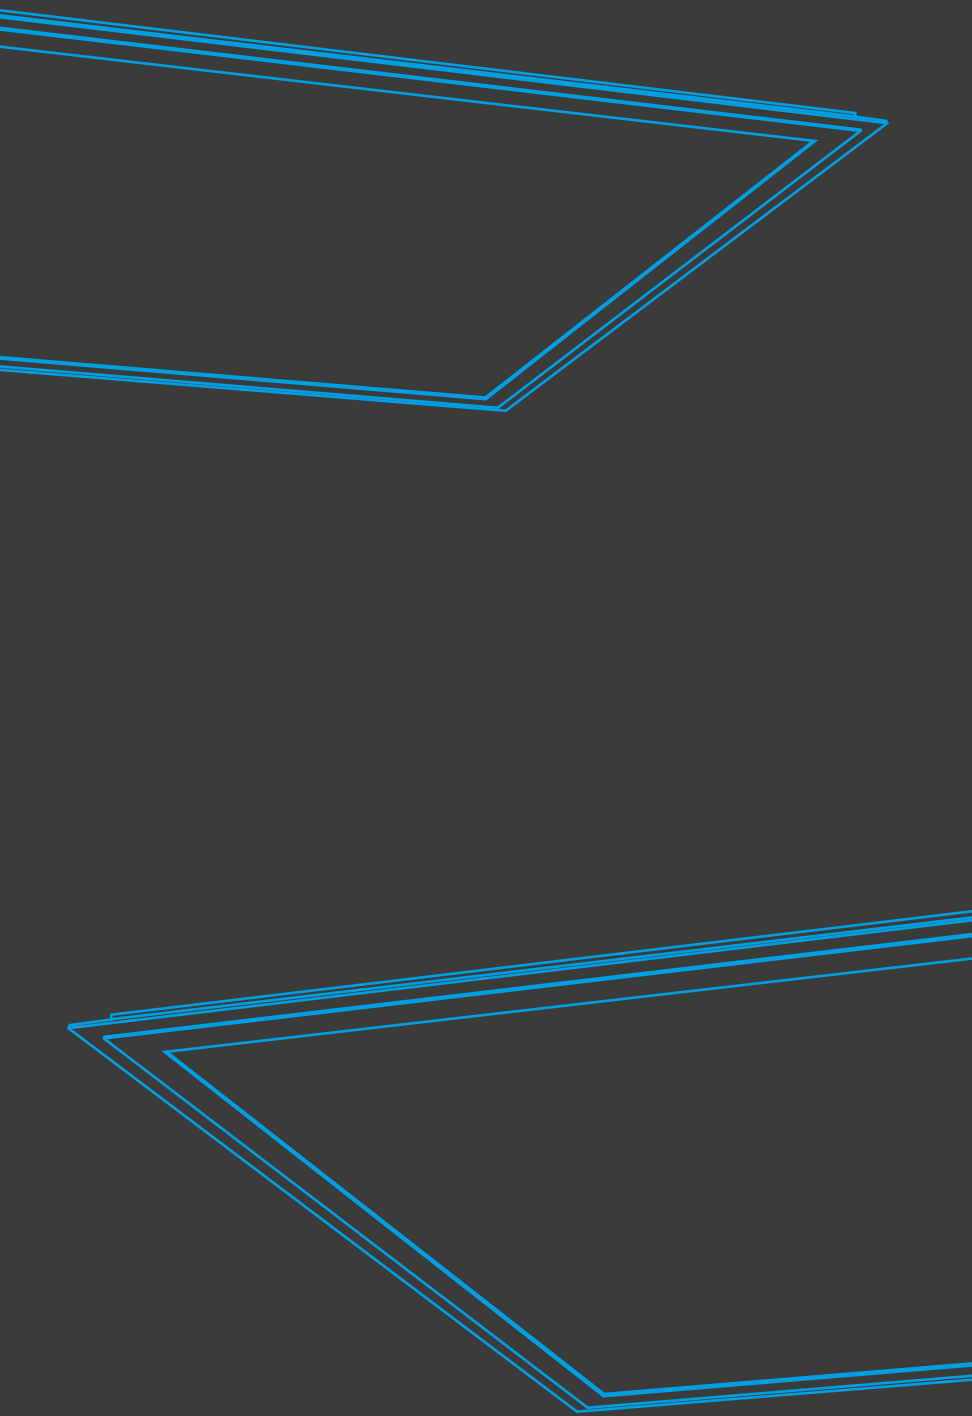

COMBINE



PANEL



surface-mounted or
recessed mounting frame



When purchasing a PANEL the mounting frame is not included as standard.

PANEL

PRODUCT ADVANTAGES

High energy savings thanks to an **efficiency of up to 200 lm/W** (depending on model at least 120 lm/W)

Especially **high energy savings** when using the PANEL P


Can be used as **office lighting thanks to UGR<19**

EASY TO INSTALL thanks to integrated through-wiring and external ballast

Flexibly adjustable thanks to **Multi-Lumen** (all variants) and **Multi-Colour** (PANEL V & C)

All DALI variants support **DC operation**

**MULTI
LUMEN** **MULTI
COLOR**

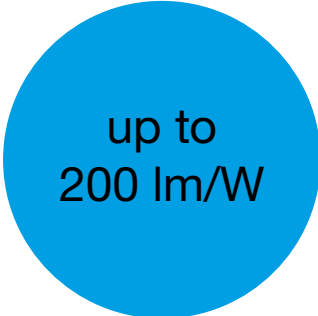

up to
200 lm/W

PRODUCT VARIANTS

	PANEL V	PANEL C	PANEL P
Service life	50.000h L80B10	70.000h L80B10	100.000h L80B50
Energy efficiency	up to 126 lm/W	up to 136 lm/W	up to 203 lm/W
UGR	<19 / <22	<19	<19
Control	Multi-Lumen, On / Off, DALI	Multi-Lumen, On / Off, DALI	Multi-Lumen, On / Off, DALI

PANEL

INDOOR



PANEL V



**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PANEL V 600 830 / 840, 34 W	○	34 W	220-240 V	4.100 lm	121 lm/W	3.000 K
				4.300 lm	126 lm/W	4.000 K
PANEL V 600 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K
PANEL V DALI 600 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K
PANEL V 625 830 / 840, 34 W	○	34 W	220-240 V	4.100 lm	121 lm/W	3.000 K
				4.300 lm	126 lm/W	4.000 K
PANEL V 625 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K
PANEL V DALI 625 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K



L x W x H (mm):
600 x 600 x 63



L x W x H (mm):
600 x 600 x 71



L x W x H (mm):
625 x 625 x 63








L x W x H (mm):
625 x 625 x 71

Product designation	Colour	Availability*	Prod no.	EUR
PANEL 600 Mounting frame	○	S	1007474	45.00
PANEL 600 Recessed mounting frames	○	S	1007575	65.00
PANEL 625 Mounting frame	○	S	1007475	45.00
PANEL 625 Recessed mounting frames	○	S	1007576	65.00

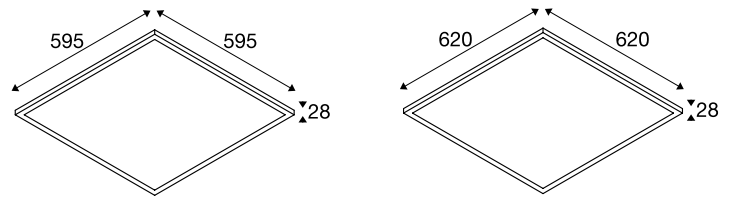All mounting frames are also compatible with Panel C and Panel P.


*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L80B10	>80	<22	115°	-	-	On / Off	✗	S	1007496	65.00
50.000h L80B10	>80	<19	85°	-	-	On / Off	✗	S	1007498	75.00
50.000h L80B10	>80	<19	85°	-	-	DALI	✓	S	1007504	110.00
50.000h L80B10	>80	<22	115°	-	-	On / Off	✗	S	1007497	65.00
50.000h L80B10	>80	<19	85°	-	-	On / Off	✗	S	1007499	75.00
50.000h L80B10	>80	<19	85°	-	-	DALI	✓	S	1007505	110.00




Ø x L (mm):
1,5 x 1500

Product designation	Colour	Availability*	Prod no.	EUR
PANEL V Safety cable 1500 mm		S	1007577	15.00

PANEL

INDOOR

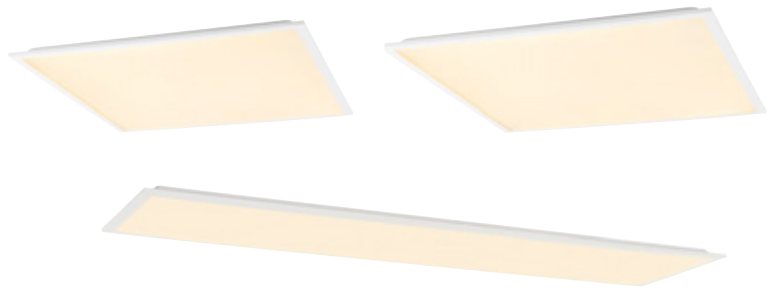

PANEL C






**MULTI
LUMEN**





**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PANEL C 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 600 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C DALI 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 600 DALI 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 625 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C DALI 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 625 DALI 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C 1200 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	129 lm/W	4.000 K
PANEL C 1200 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.200 lm	123 lm/W	3.000 K
				4.400 lm	129 lm/W	4.000 K
PANEL C 1200 DALI 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	129 lm/W	4.000 K
PANEL C 1200 DALI 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.200 lm	123 lm/W	3.000 K
				4.400 lm	129 lm/W	4.000 K

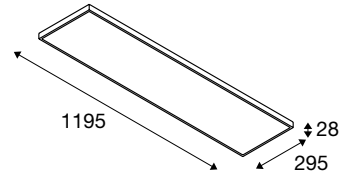The matching mounting frames can be found on page 28.

*S = in stock
O = to order



	CRI	UGR				Emergency lighting	Control	Availability*	Prod no.	EUR
70.000h L80B10	>80	<19	90°	-	-	✗	On / Off	S	1008597	114.00
70.000h L80B10	>90	<19	90°	-	-	✗	On / Off	S	1008599	114.00
70.000h L80B10	>80	<19	90°	-	-	✓	DALI	S	1008601	139.00
70.000h L80B10	>90	<19	90°	-	-	✓	DALI	S	1008603	139.00
70.000h L80B10	>80	<19	90°	-	-	✗	On / Off	S	1008598	114.00
70.000h L80B10	>90	<19	90°	-	-	✗	On / Off	S	1008600	114.00
70.000h L80B10	>80	<19	90°	-	-	✓	DALI	S	1008602	139.00
70.000h L80B10	>90	<19	90°	-	-	✓	DALI	S	1008604	139.00
70.000h L80B10	>80	<19	90°	-	-	✗	On / Off	S	1008605	114.00
70.000h L80B10	>90	<19	90°	-	-	✗	On / Off	S	1008606	114.00
70.000h L80B10	>80	<19	90°	-	-	✓	DALI	S	1008607	139.00
70.000h L80B10	>90	<19	90°	-	-	✓	DALI	S	1008608	139.00



Ø x L (mm):
1,5 x 1500



L x W x H (cm):
4 x 3,5 x 3,2

Product designation	Colour	Availability*	Prod no.	EUR
PANEL C Suspension cable 1500 mm		S	1008609	19.90
PANEL C Mounting spring 4 pieces		S	1008610	14.90

PANEL

INDOOR



PANEL P




**MULTI
LUMEN**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PANEL P 595 45 840 WB UGR19 ML WH	○	42 W	220-240 V	6.900 lm	203 lm/W	4.000 K
PANEL P 595 45 830 WB UGR19 ML WH	○	42 W	220-240 V	6.500 lm	203 lm/W	3.000 K
PANEL P 595 45 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.900 lm	200 lm/W	4.000 K
PANEL P 595 45 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.500 lm	200 lm/W	3.000 K
PANEL P 625 45 840 WB UGR19 ML WH	○	42 W	220-240 V	6.900 lm	203 lm/W	4.000 K
PANEL P 625 45 830 WB UGR19 ML WH	○	42 W	220-240 V	6.500 lm	203 lm/W	3.000 K
PANEL P 625 45 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.900 lm	200 lm/W	4.000 K
PANEL P 625 45 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.500 lm	200 lm/W	3.000 K
PANEL P 1200/300 45 840 WB UGR19 ML WH	○	42 W	220-240 V	6.700 lm	190 lm/W	4.000 K
PANEL P 1200/300 45 830 WB UGR19 ML WH	○	42 W	220-240 V	6.400 lm	190 lm/W	3.000 K
PANEL P 1200/300 45 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.700 lm	200 lm/W	4.000 K
PANEL P 1200/300 45 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.400 lm	200 lm/W	3.000 K
PANEL P 1200/600 60 840 WB UGR19 ML WH	○	42 W	220-240 V	7.000 lm	203 lm/W	4.000 K
PANEL P 1200/600 60 830 WB UGR19 ML WH	○	42 W	220-240 V	6.700 lm	203 lm/W	3.000 K
PANEL P 1200/600 60 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	7.000 lm	203 lm/W	4.000 K
PANEL P 1200/600 60 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.700 lm	203 lm/W	3.000 K

The matching mounting frames can be found on page 28.




*S = in stock
O = to order

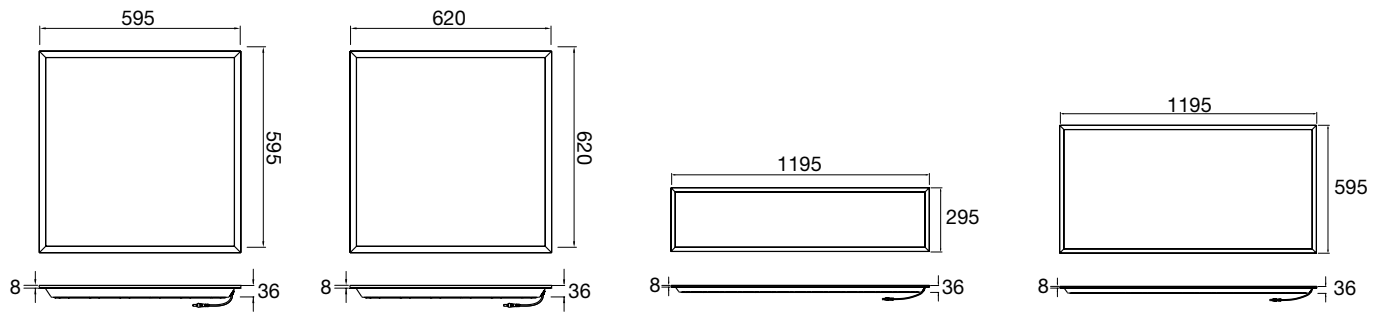

	CRI	UGR				Emergency lighting	Control	Availability*	Prod no.	EUR
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010747	130.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010748	130.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010749	150.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010750	150.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010109	130.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010110	130.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010111	150.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010112	150.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010113	140.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010114	140.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010115	160.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010116	160.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010117	170.00
100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010118	170.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010119	200.00
100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010120	200.00

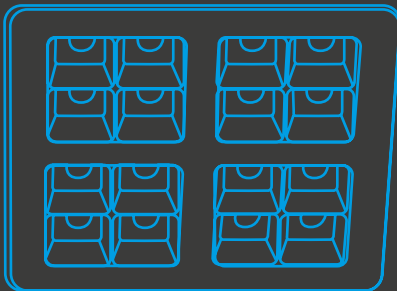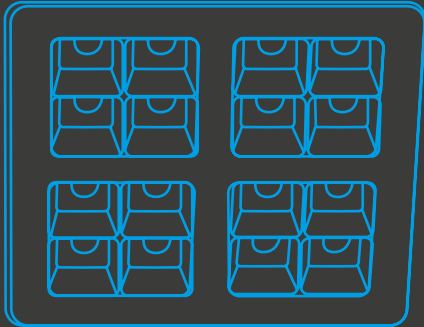

Multi-Colour:
3.000 K / 4.000 K / 5.000 K



PAVANNO

PRODUCT ADVANTAGES

High energy savings thanks to an **Efficiency of up to 190 lm/W**

Can be used as **office lighting thanks to UGR<19**

Service life up to **100,000 hours**



EASY TO INSTALL thanks to integrated through-wiring and external ballast

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

All DALI variants support **DC operation**

Service life
100,000
hours

**MULTI
LUMEN** **MULTI
COLOR**

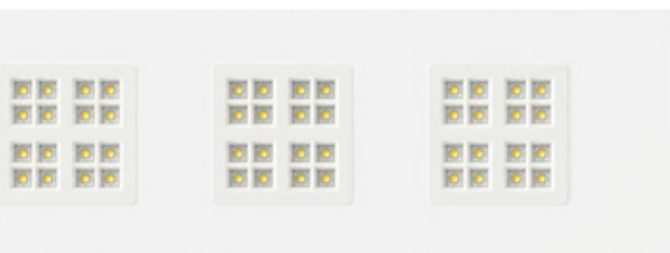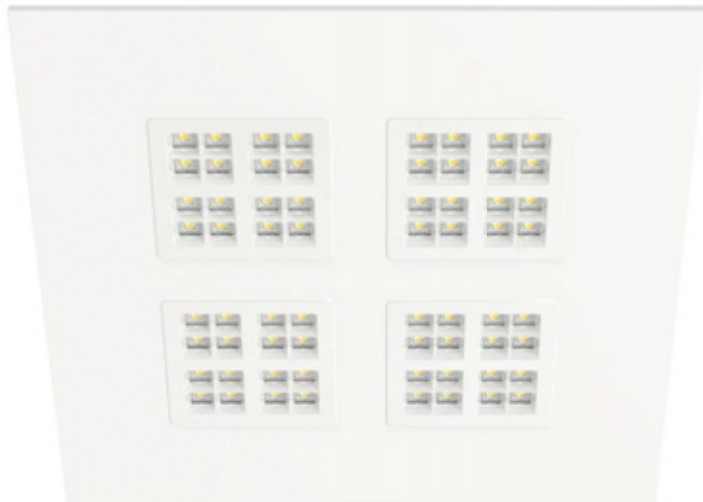

PAVANNO

INDOOR



PAVANNO




**MULTI
LUMEN**





**MULTI
COLOR**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PAVANNO 600 45 830/840/850 WB WH UGR19	○	39 W	220-240 V	6.600 lm	180 lm/W	3.000 K
				6.900 lm	190 lm/W	4.000 K
				6.900 lm	190 lm/W	5.000 K
PAVANNO 600 45 830/840/850 WB WH UGR19 DALI	○	38 W	220-240 V	6.300 lm	175 lm/W	3.000 K
				6.800 lm	185 lm/W	4.000 K
				6.800 lm	185 lm/W	5.000 K
PAVANNO 600 45 830/840/850 WB BK, UGR19	●	39 W	220-240 V	6.200 lm	170 lm/W	3.000 K
				6.600 lm	180 lm/W	4.000 K
				6.600 lm	180 lm/W	5.000 K
PAVANNO 600 45 830/840/850 WB BK, UGR19 DALI	●	38 W	220-240 V	6.000 lm	160 lm/W	3.000 K
				6.400 lm	170 lm/W	4.000 K
				6.400 lm	170 lm/W	5.000 K
PAVANNO 625 45 830/840/850 WB WH UGR19	○	39 W	220-240 V	6.600 lm	180 lm/W	3.000 K
				6.900 lm	190 lm/W	4.000 K
				6.900 lm	190 lm/W	5.000 K
PAVANNO 625 45 830/840/850 WB WH UGR19 DALI	○	38 W	220-240 V	6.300 lm	175 lm/W	3.000 K
				6.800 lm	185 lm/W	4.000 K
				6.800 lm	185 lm/W	5.000 K
PAVANNO 1200/300 45 830/840/850 WB WH UGR19	○	39 W	220-240 V	6.600 lm	180 lm/W	3.000 K
				6.900 lm	190 lm/W	4.000 K
				6.900 lm	190 lm/W	5.000 K
PAVANNO 1200/300 45 830/840/850 WB WH UGR19 DALI	○	38 W	220-240 V	6.300 lm	175 lm/W	3.000 K
				6.800 lm	185 lm/W	4.000 K
				6.800 lm	185 lm/W	5.000 K

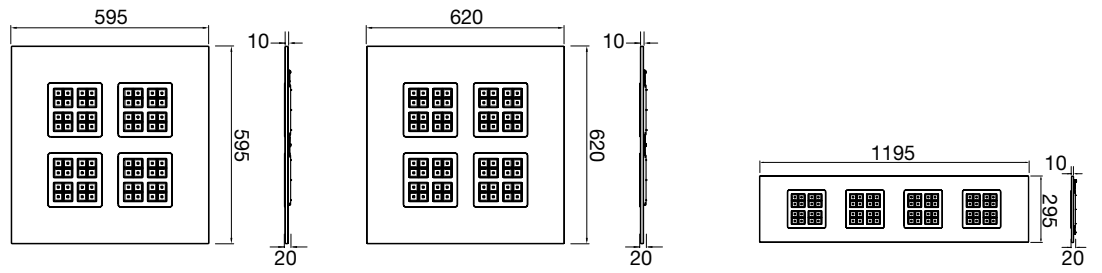Other sizes are available on request.

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010713	195.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010714	200.00
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010716	195.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010715	200.00
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010121	185.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010122	200.00
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010123	235.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010124	250.00

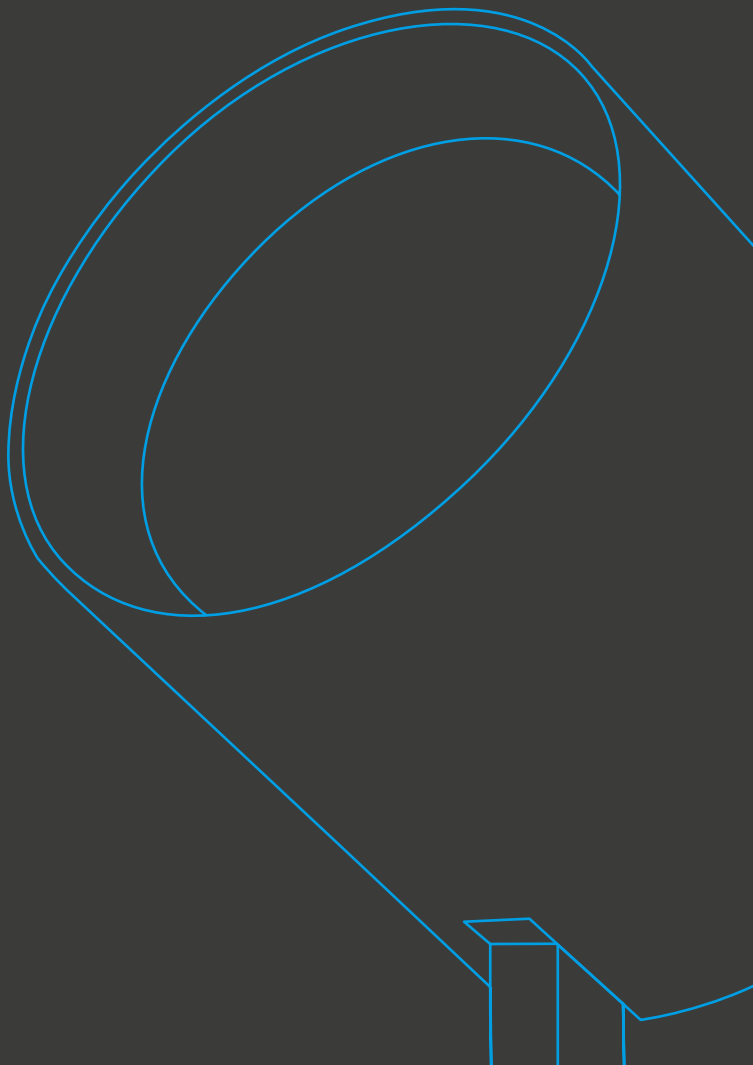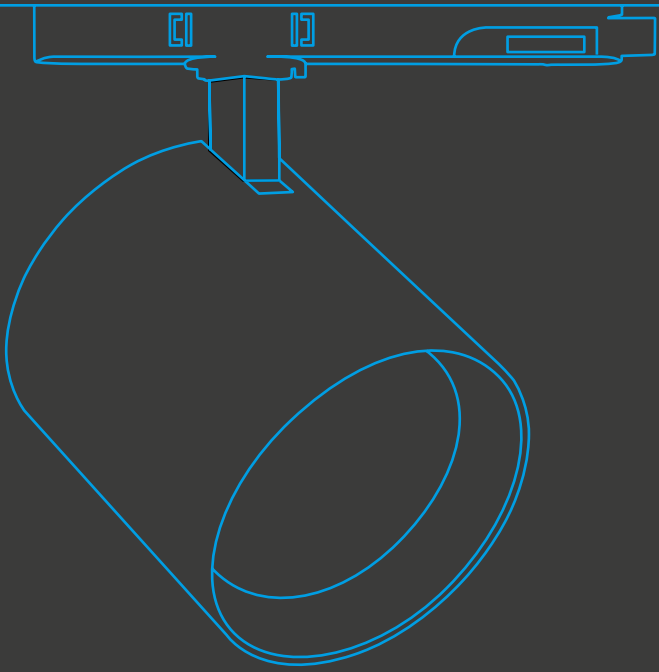

With 36° or 50° beam angle



TRACKSPOT

PRODUCT ADVANTAGES

54 Product variants - for maximum flexibility and customised use

Outstanding light quality thanks to **CRI>90**

Simple and timeless design



PRODUCT VARIANTS

	TRACKSPOT V	TRACKSPOT C	TRACKSPOT P
Service life	50.000h L70B50	50.000h L70B50	75.000h L80B10
Energy efficiency	up to 130 lm/W	up to 152 lm/W	up to 170 lm/W
CRI	>90	>90	>90
Control	On / Off	On / Off	On / Off

TRACKSPOT

INDOOR




TRACKSPOT V







IP20 IK02

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
TRACKSPOT V 3-ph, 18 W, 930, 36°, white	○	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 930, 36°, black	●	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 930, 50°, white	○	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 930, 50°, black	●	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 940, 36°, white	○	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 18 W, 940, 36°, black	●	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 18 W, 940, 50°, white	○	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 18 W, 940, 50°, black	●	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 930, 36°, white	○	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 930, 36°, black	●	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 930, 50°, white	○	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 930, 50°, black	●	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 940, 36°, white	○	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 940, 36°, black	●	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 940, 50°, white	○	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 940, 50°, black	●	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008844	90.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008845	90.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008846	90.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008847	90.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008848	90.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008849	90.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008850	90.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008851	90.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008852	110.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008853	110.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008854	110.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008855	110.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008856	110.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008857	110.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008858	110.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008859	110.00

TRACKSPOT

INDOOR








TRACKSPOT C



Product designation	Colour	Max. total wattage	Mains voltage	Max. flux	Efficiency	Colour temperature
TRACKSPOT C 3-ph, 17 W, 930, 36°, white	○	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 930, 36°, black	●	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 930, 50°, white	○	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 930, 50°, black	●	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 940, 36°, white	○	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 17 W, 940, 36°, black	●	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 17 W, 940, 50°, white	○	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 17 W, 940, 50°, black	●	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 930, 36°, white	○	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 930, 36°, black	●	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 930, 50°, white	○	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 930, 50°, black	●	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 940, 36°, white	○	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 940, 36°, black	●	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 940, 50°, white	○	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 940, 50°, black	●	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008860	100.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008861	100.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008862	100.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008863	100.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008864	100.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008865	100.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008866	100.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008867	100.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008868	120.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008869	120.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008870	120.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008871	120.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008872	120.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008873	120.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008874	120.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008875	120.00

TRACKSPOT

INDOOR








TRACKSPOT P



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
TRACKSPOT P 3PH. 33 930 MB ML BK	●	28 W	220-240 V	4.360 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 33 930 MB ML WH	○	28 W	220-240 V	4.360 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 940 MB ML BK	●	28 W	220-240 V	4.450 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 940 MB ML WH	○	28 W	220-240 V	4.450 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 33 930 WB ML BK	●	28 W	220-240 V	4.330 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 33 930 WB ML WH	○	28 W	220-240 V	4.330 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 940 WB ML BK	●	28 W	220-240 V	4.390 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 940 WB ML WH	○	28 W	220-240 V	4.390 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 930 VWB ML BK	●	28 W	220-240 V	4.450 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 930 VWB ML WH	○	28 W	220-240 V	4.450 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 940 VWB ML BK	●	28 W	220-240 V	4.540 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 940 VWB ML WH	○	28 W	220-240 V	4.540 lm	170 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010591	150.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	O	1010592	150.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010593	150.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010594	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010599	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010600	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010601	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010602	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	S	1010607	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010608	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	S	1010609	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010610	150.00

TRACKSPOT

INDOOR




TRACKSPOT P








IP20 IK03

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
TRACKSPOT P 3PH. 56 930 MB ML BK	●	35 W	220-240 V	5.640 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 56 930 MB ML WH	○	35 W	220-240 V	5.640 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 57 940 MB ML BK	●	35 W	220-240 V	5.750 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 57 940 MB ML WH	○	35 W	220-240 V	5.750 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 56 930 WB ML BK	●	35 W	220-240 V	5.630 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 56 930 WB ML WH	○	35 W	220-240 V	5.630 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 56 940 WB ML BK	●	35 W	220-240 V	5.670 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 57 940 WB ML WH	○	35 W	220-240 V	5.670 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 57 930 VWB ML BK	●	35 W	220-240 V	5.750 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 57 930 VWB ML WH	○	35 W	220-240 V	5.750 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 58 940 VWB ML BK	●	35 W	220-240 V	5.870 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 58 940 VWB ML WH	○	35 W	220-240 V	5.870 lm	164 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010595	150.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010596	150.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	O	1010597	150.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010598	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010603	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010604	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010605	150.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010606	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010611	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010612	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010613	150.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010614	150.00

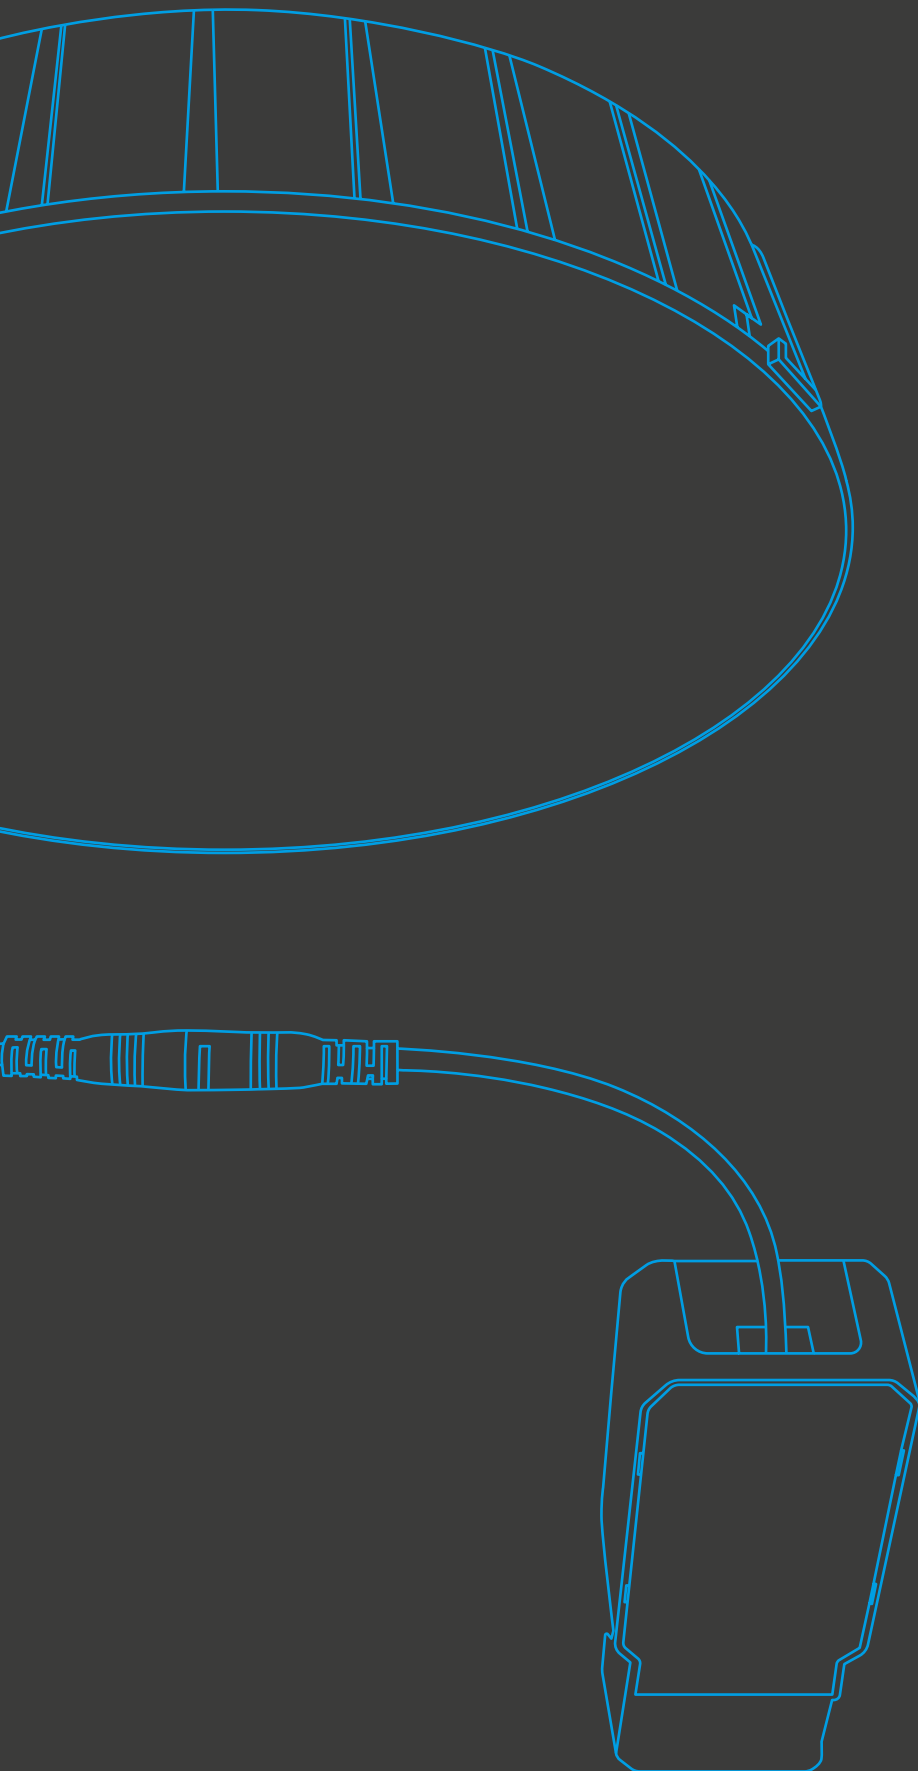

COMBINE



DOWNLIGHT V
100 / 150 / 200

+



Flat or recessed bezels in three
sizes and two colours each

=



When purchasing a DOWNLIGHT the mounting
frame is not included as standard.

DOWNLIGHT

PRODUCT ADVANTAGES

Easy change between the slightly recessed and flat bezels thanks to the bayonet lock on DOWNLIGHT V

EASY TO INSTALL due to the LED driver's integrated quick-connect connection box

Less rework on site due to **Common installation diameters**

Flexibly adjustable thanks to **Multi-Lumen** (all versions) and **Multi-Colour** (Downlight V)

MULTI LUMEN MULTI COLOR



PRODUCT VARIANTS

	DOWNLIGHT V	DOWNLIGHT C	DOWNLIGHT P
Service life	50.000h L70B50	70.000h L80B10	80.000h L80B10
Energy efficiency	up to 126 lm/W	up to 129 lm/W	up to 170 lm/W
UGR	>28	22	21 / 23
Control	On / Off	On / Off, DALI	On / Off, DALI

DOWNLIGHT

INDOOR



DOWNLIGHT V






**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
DOWNLIGHT V 100 830 / 840, 6 W, IP54	●	6 W	220-240 V	610 lm	101 lm/W	3.000 K
				640 lm	106 lm/W	4.000 K
DOWNLIGHT V 150 830 / 840, 9 / 15 W, IP54	●	15 W	220-240 V	1.750 lm	116 lm/W	3.000 K
				1.900 lm	126 lm/W	4.000 K
DOWNLIGHT V 200 830 / 840, 15 / 21 W, IP54	●	21 W	220-240 V	2.360 lm	112 lm/W	3.000 K
				2.490 lm	118 lm/W	4.000 K

*S = in stock
O = to order

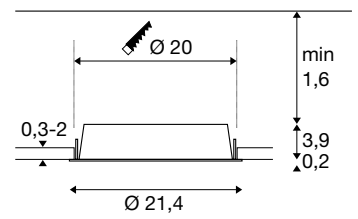

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L70B50	>80	>28	105°	-	-	On / Off	✗	S	1007508	45.00
50.000h L70B50	>80	>28	105°	-	-	On / Off	✗	S	1007509	53.00
50.000h L70B50	>80	>28	105°	-	-	On / Off	✗	S	1007510	60.00



Product designation	Colour	Availability*	Prod no.	EUR
DOWNLIGHT V 100 black flat bezel	●	S	1007477	5.00
DOWNLIGHT V 100 white flat bezel	○	S	1007476	5.00
DOWNLIGHT V 100 recessed bezel black	●	S	1007479	5.00
DOWNLIGHT V 100 recessed bezel white	○	S	1007478	5.00
DOWNLIGHT V 150 black flat bezel	●	S	1007481	7.00
DOWNLIGHT V 150 white flat bezel	○	S	1007480	7.00
DOWNLIGHT V 150 recessed bezel black	●	S	1007483	7.00
DOWNLIGHT V 150 recessed bezel white	○	S	1007482	7.00
DOWNLIGHT V 200 black flat bezel	●	S	1007485	10.00
DOWNLIGHT V 200 white flat bezel	○	S	1007484	10.00
DOWNLIGHT V 200 recessed bezel black	●	S	1007487	10.00
DOWNLIGHT V 200 recessed bezel white	○	S	1007486	10.00

DOWNLIGHT

INDOOR








DOWNLIGHT C

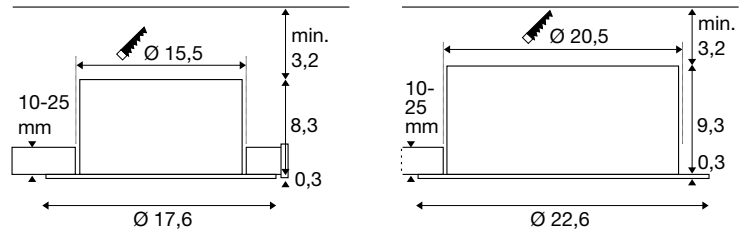

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
DOWNLIGHT C 150 8 / 14 / 20 W, 930	○	20 W	220-240 V	2.250 lm	112 lm/W	3.000 K
DOWNLIGHT C 150 8 / 14 / 20 W, 940	○	20 W	220-240 V	2.400 lm	120 lm/W	4.000 K
DOWNLIGHT C 200 8 / 16 / 24 W, 930	○	24 W	220-240 V	2.850 lm	118 lm/W	3.000 K
DOWNLIGHT C 200 8 / 16 / 24 W, 940	○	24 W	220-240 V	3.100 lm	129 lm/W	4.000 K
DOWNLIGHT C dali 150 20 W, 930	○	20 W	220-240 V	2.250 lm	112 lm/W	3.000 K
DOWNLIGHT C DALI 150 20 W, 940	○	20 W	220-240 V	2.400 lm	120 lm/W	4.000 K
DOWNLIGHT C DALI 200 24 W, 930	○	24 W	220-240 V	2.850 lm	118 lm/W	3.000 K
DOWNLIGHT C DALI 200 24 W, 940	○	24 W	220-240 V	3.100 lm	129 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008621	89.00
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008622	89.00
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008623	109.00
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008624	109.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008625	129.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008626	129.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008627	149.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008628	149.00

DOWNLIGHT

INDOOR



DOWNLIGHT P








**MULTI
LUMEN**


Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
DOWNLIGHT P 12 HG 840 60 ML DALI WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 12 HG 840 60 ML WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 12 WM 840 60 ML WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 12 WM 840 60 ML DALI WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 HG 840 60 ML DALI WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 HG 840 60 ML WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 WM 840 60 ML WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 WM 840 60 ML DALI WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 30 HG 840 60 ML WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 30 HG 840 60 ML DALI WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 30 WM 840 60 ML DALI WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 30 WM 840 60 ML WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 HG 840 60 ML DALI WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 WM 840 60 ML DALI WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 HG 840 60 ML WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 WM 840 60 ML WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K

*S = in stock (november 2025)

O = to order

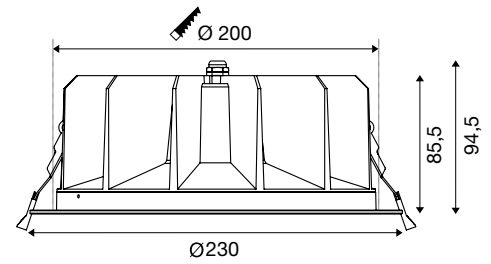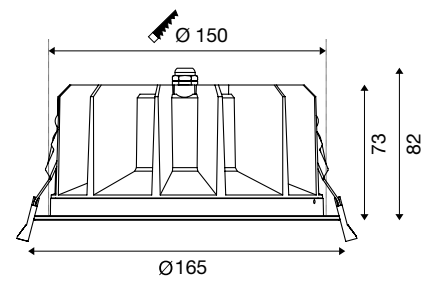

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010755	120.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010756	80.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010757	80.00
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010758	120.00
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010759	150.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010760	120.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010761	120.00
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010762	150.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010763	150.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010764	180.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010765	180.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010766	150.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010767	230.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010768	230.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010769	200.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010770	200.00

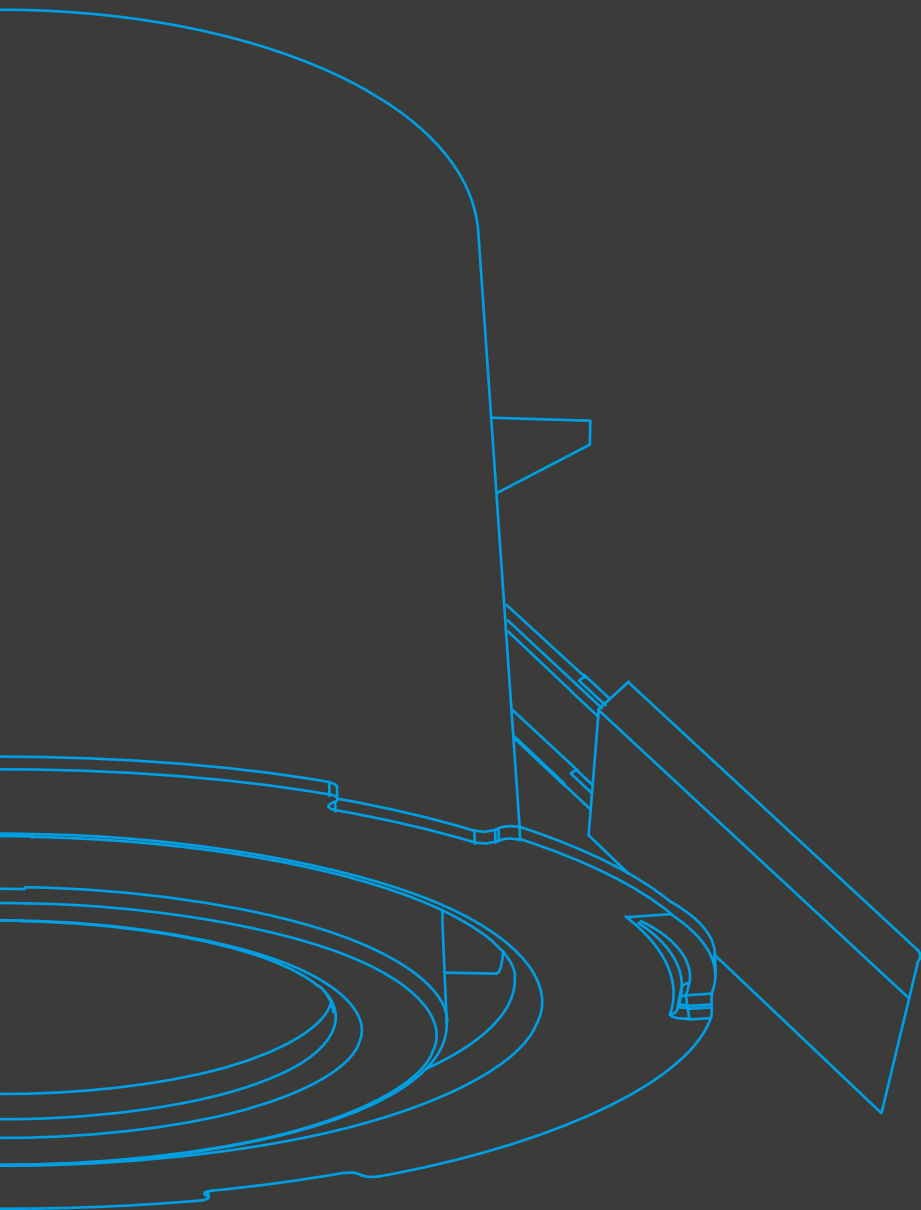

COMBINE



UNIVERSAL
DOWNLIGHT



Bezel in black or white, fixed or
swivelling, round or square



When purchasing a UNIVERSAL DOWNLIGHT multipack, the bezels are not included as standard.

UNIVERSAL DOWNLIGHT

NEW:
Lockable
springs

PRODUCT ADVANTAGES

Fixed (IP65) and swivelling (IP20) downlight in one product

Flexibly adjustable thanks to **Multi-Colour** 2,700 K / 3,000 K / 4,000 K / 6,500 K and **Multi-Lumen** 5W / 7W

EASY TO INSTALL thanks to the quick-release connection box and lockable springs

Airtight when used with IP65 rigid covers

Can be installed directly into the insulation or covered with insulation.

Tested for use in fire-retardant rated suspended ceilings

**MULTI
LUMEN** **MULTI
COLOR**



UNIVERSAL DOWNLIGHT

INDOOR



UNIVERSAL DOWNLIGHT



**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
UNIVERSAL DOWNLIGHT <i>PHASE Multipack, 12 pieces</i>	●	7 W	220-240 V	670 lm	95 lm/W	2.700 K
				680 lm	97 lm/W	3.000 K
				690 lm	98 lm/W	4.000 K
				680 lm	97 lm/W	6.500 K




L x W x H (mm):
88 x 88 x 35

Ø x L (mm):
88 x 35

Product designation	Colour	Availability*	Prod no.	EUR
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, square, black</i>	●	S	1007184	4.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, square, white</i>	○	S	1007185	4.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, round, black</i>	●	S	1007091	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, round, white</i>	○	S	1007092	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, square, black</i>	●	S	1008096	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, square, white</i>	○	S	1008095	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, round, black</i>	●	S	1008067	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, round, white</i>	○	S	1008068	3.00

*S = in stock
O = to order



CRI

UGR



Control

Emergency lighting

Availability*

Prod no.

EUR

50.000h
L80B50

>90

-

38°

-

30°



Phase

×

S

1008066

289.00

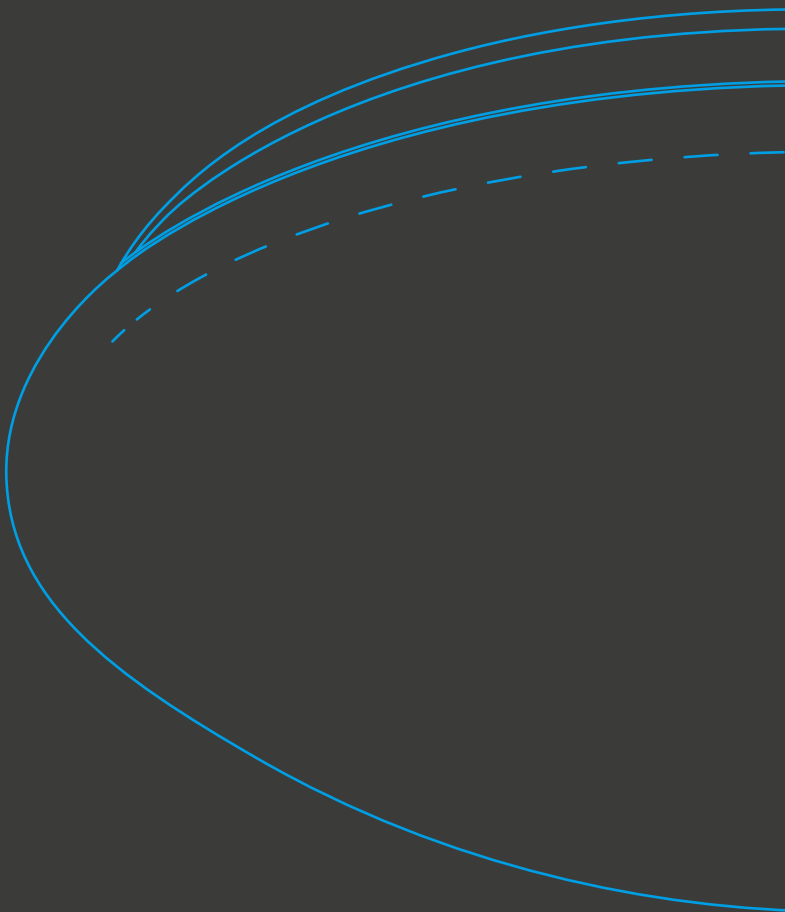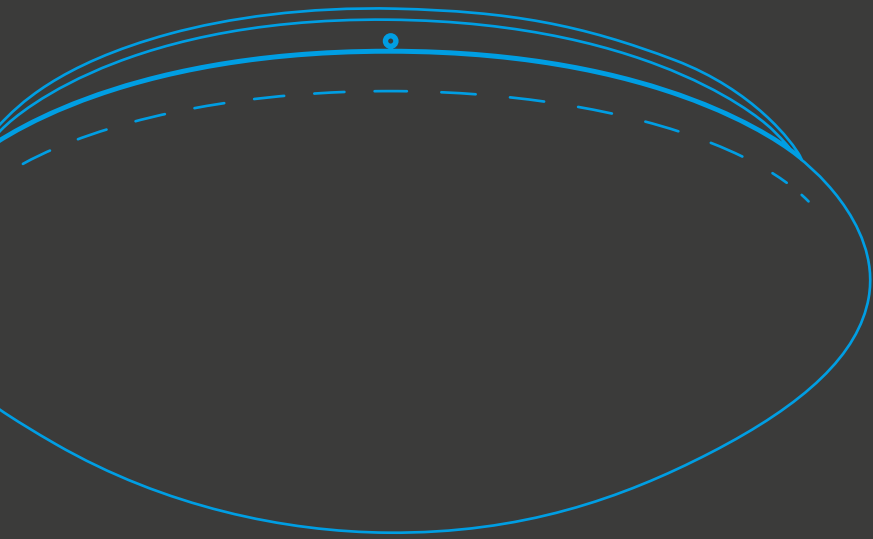

3.000 K

or

4.000 K



SURFACE

PRODUCT ADVANTAGES

Splash-proof and dust-proof light **IP44**

for use in the bathroom, stairwell or cellar

Flexibly adjustable thanks to **Multi-Colour** and **Multi-Lumen**

EASY TO INSTALL thanks to removable cover

Sensor variant for highly energy-efficient use

**MULTI
LUMEN** **MULTI
COLOR**



Variant
with sensor
available

SURFACE

INDOOR



SURFACE V








MULTI
LUMEN


MULTI
COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
SURFACE V 390 390, 830 / 840, 10 / 15 / 22 W, IP44	○	20 W	220-240 V	1.850 lm	93 lm/W	3.000 K
				2.000 lm	100 lm/W	4.000 K
SURFACE V 390 390, 11 / 16 / 23 W, 830 / 840, Sensor	○	20 W	220-240 V	1.850 lm	93 lm/W	3.000 K
				2.000 lm	100 lm/W	4.000 K



*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L80B10	>80	-	120°	-	-	On / Off	×	S	1007516	50.00
50.000h L80B10	>80	-	120°	-	-	On / Off	×	S	1007517	65.00

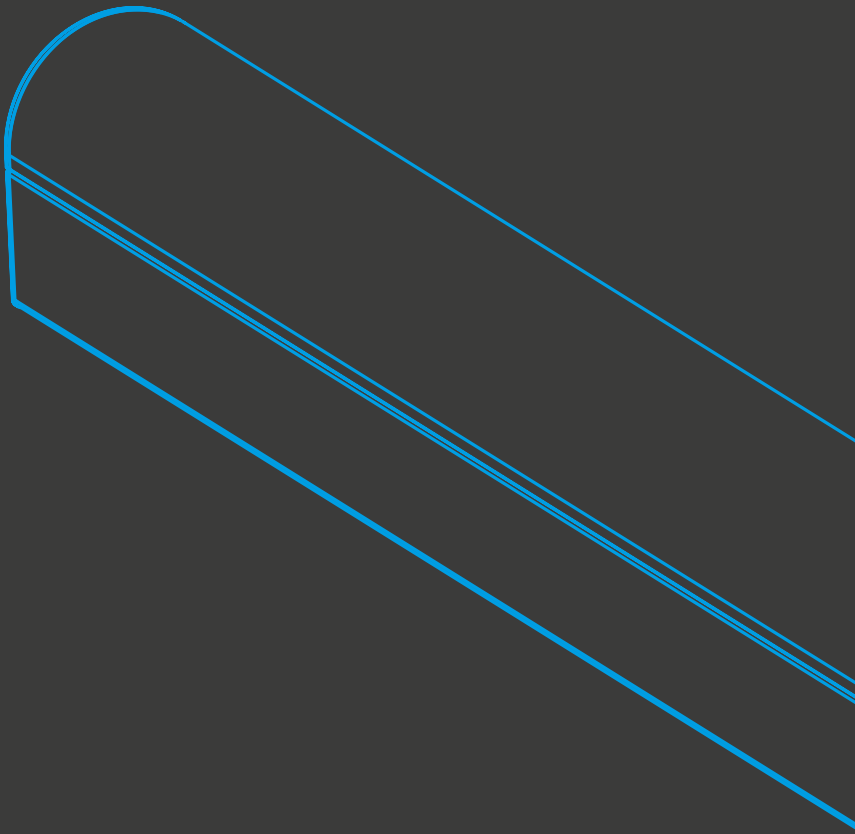

Integrated PIR sensor for motion-dependent light control, with adjustable range and run-on time.

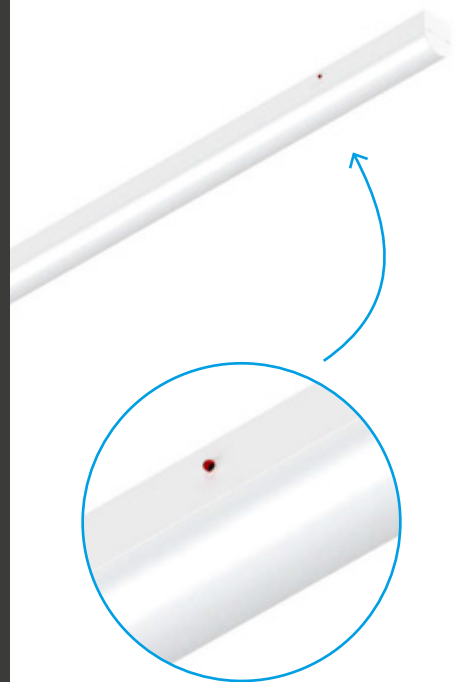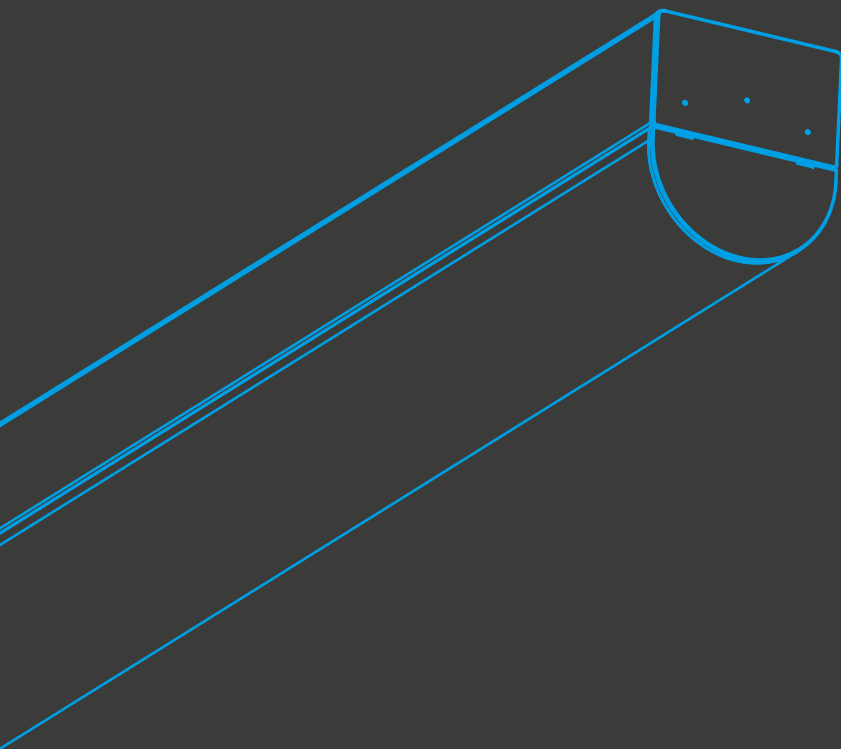

Emergency lighting module with automated self-test function in accordance with EN 62034 – up to 3 hours of autonomy in the event of a power failure.

BATTEN

PRODUCT ADVANTAGES

Replacement product for conventional T5/T8 lights

Service life up to **100,000 hours**

EASY TO INSTALL thanks to through-wiring as standard

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

All DALI variants support **DC operation**

Halogen-free


**MULTI
LUMEN** **MULTI
COLOR**



Service life
100,000
hours

BATTEN

INDOOR

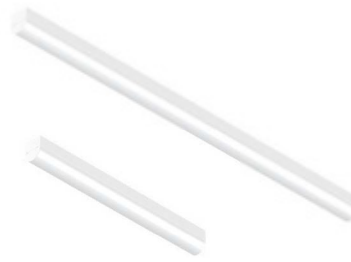

BATTEN P








**MULTI
LUMEN**

**MULTI
COLOR**

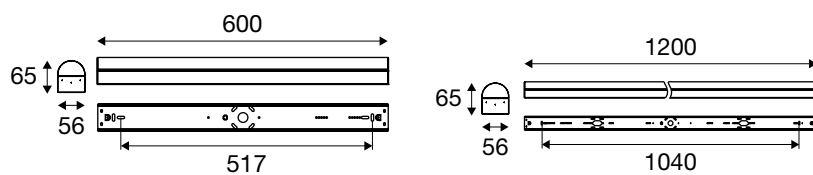Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
BATTEN P 600 28, 830 / 840 / 850, WH	○	20 W	220-240 V	2.600 lm	130 lm/w	3.000 K
				2.800 lm	140 lm/w	4.000 K
				2.800 lm	140 lm/w	5.000 K
BATTEN P 600 52, 830 / 840 / 850, WH	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 600 52, 830 / 840 / 850, WH, EM, 3H	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 1200 52, 830 / 840 / 850, WH, PIR	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 1200 52, 830 / 840 / 850, WH, DALI	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 1200 52, 830 / 840 / 850, WH, DALI, EM, 3H	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K


*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009251	50.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009252	70.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009253	130.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009254	100.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	○	1009258	120.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	○	1009259	200.00



L (mm): 2000

Product designation	Colour	Availability*	Prod no.	EUR
BATTEN P SCK 2000 Safety cable 2000mm		○	1009262	10.00

BATTEN

INDOOR



BATTEN P








**MULTI
LUMEN**

**MULTI
COLOR**

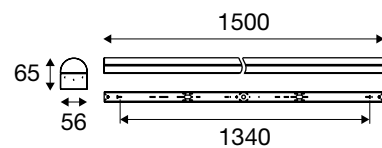Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
BATTEN P 1500 <i>72, 830 / 840 / 850, WH</i>	○	48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 <i>72, 830 / 840 / 850, WH, EM, 3H</i>	○	48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 <i>72, 830 / 840 / 850, WH, PIR</i>	○	48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 <i>72, 830 / 840 / 850, WH, DALI</i>	○	48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 <i>72, 830 / 840 / 850, WH, DALI, EM, 3H</i>	○	48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K


*S = in stock
○ = to order






	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009255	80.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009256	140.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	○	1009257	110.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	○	1009260	120.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	○	1009261	185.00



L (mm): 2000

Product designation	Colour	Availability*	Prod no.	EUR
BATTEN P SCK 2000 Safety cable 2000mm		○	1009262	10.00

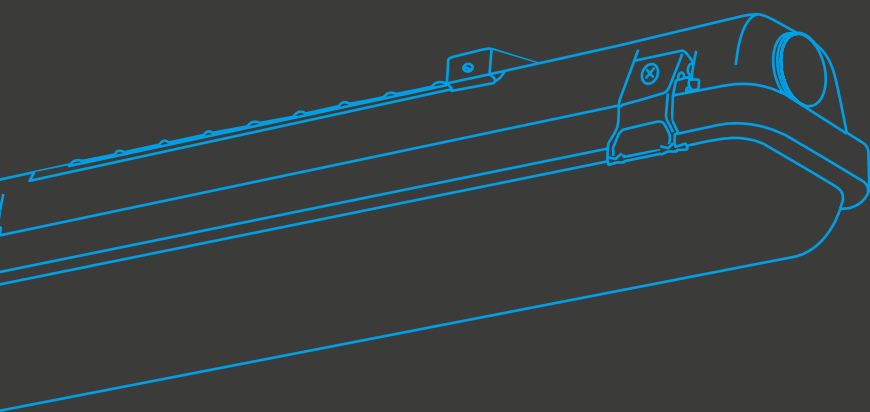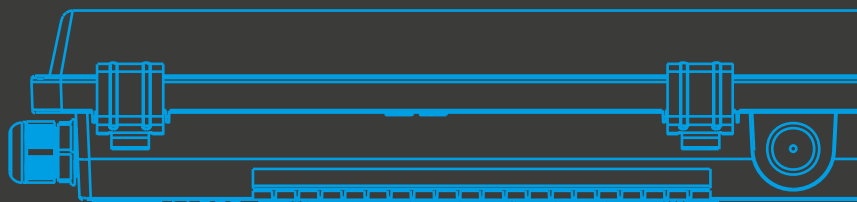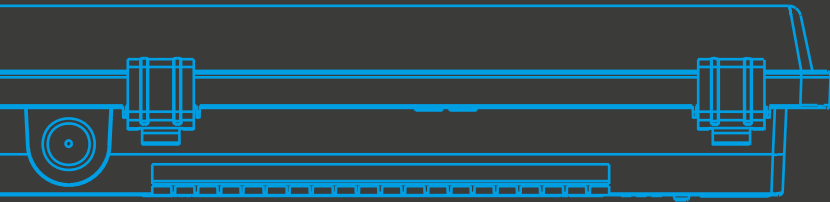

WATERPROOF V



WATERPROOF C & P



Open the cap without tools

Emergency lighting module with automated self-test function in accordance with EN 62034 – up to 3 hours of autonomy in the event of a power failure.

WATERPROOF

PRODUCT ADVANTAGES

High energy savings thanks to **Efficiencies of up to 180 lm/W** (depending on model at least 130 lm/W)

Reliable use in demanding environments thanks to IP65, IK08 and a service life of up to **100,000 hours**

EASY TO INSTALL thanks to tool-free cap opening for quick installation and maintenance as well as integrated through-wiring

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

All versions support **DC operation**

Optionally available **with HF sensor** for intelligent and energy-efficient control

Service life
100,000
hours

MULTI LUMEN **MULTI COLOR**



PRODUCT VARIANTS

	WATERPROOF V	WATERPROOF C	WATERPROOF P
Service life	50.000h L80B10	75.000h L80B10	100.000h L80B10
Energy efficiency	140 lm/W	150 lm/W	180 lm/W
CRI	>80	>80	>80
Control	On / Off, DALI	On / Off, DALI, Sensor	On / Off, DALI, Sensor

WATERPROOF

INDOOR

WATERPROOF V






MULTI LUMEN **MULTI COLOR**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF V 600 28 830/840/850 ML IP65	○	20 W	220-240 V	2.600 lm	140 lm/W	3.000 K
				2.800 lm	140 lm/W	4.000 K
				2.800 lm	140 lm/W	5.000 K
WATERPROOF V DALI 600 28 830/840/850 ML DALI IP65	○	20 W	220-240 V	2.600 lm	140 lm/W	3.000 K
				2.800 lm	140 lm/W	4.000 K
				2.800 lm	140 lm/W	5.000 K
WATERPROOF V 1200 41 830/840/850 ML IP65	○	27 W	220-240 V	3.800 lm	140 lm/W	3.000 K
				4.100 lm	140 lm/W	4.000 K
				4.000 lm	140 lm/W	5.000 K
WATERPROOF V DALI 1200 41 830/840/850 ML DALI IP65	○	27 W	220-240 V	3.800 lm	140 lm/W	3.000 K
				4.100 lm	140 lm/W	4.000 K
				4.000 lm	140 lm/W	5.000 K
WATERPROOF V 1500 60 830/840/850 ML IP65	○	40 W	220-240 V	5.600 lm	140 lm/W	3.000 K
				6.000 lm	140 lm/W	4.000 K
				6.000 lm	140 lm/W	5.000 K
WATERPROOF V DALI 1500 60 830/840/850 ML DALI IP65	○	40 W	220-240 V	5.600 lm	140 lm/W	3.000 K
				6.000 lm	140 lm/W	4.000 K
				6.000 lm	140 lm/W	5.000 K

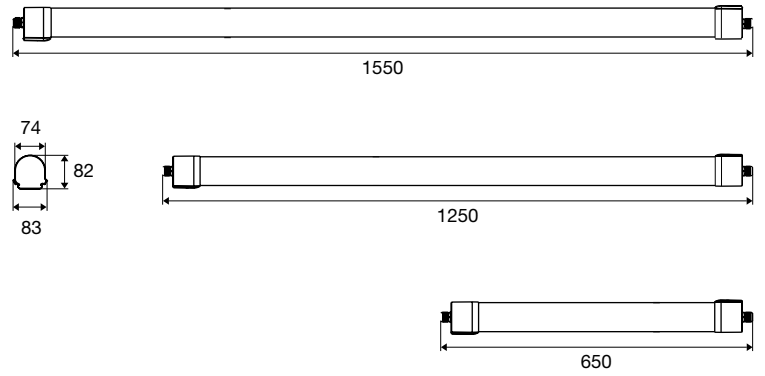*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	0,8 kg	On / Off	✓	S	1010834	67.00
50.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	0,8 kg	DALI	✓	S	1010837	107.00
50.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,49 kg	On / Off	✓	S	1010835	87.00
50.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,49 kg	DALI	✓	S	1010838	130.00
50.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,78 kg	On / Off	✓	S	1010836	100.00
50.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,78 kg	DALI	✓	S	1010839	143.00

WATERPROOF

INDOOR

WATERPROOF C




**MULTI
LUMEN**



**MULTI
COLOR**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF C 1200 57 830/840/850 ML IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML EM 3H IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML HF IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML HF EM 3H IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML DALI IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML DALI EM 3H IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010809	83.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010810	159.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010811	112.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	O	1010812	184.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	S	1010817	126.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	O	1010818	203.00

WATERPROOF

INDOOR

WATERPROOF C






MULTI LUMEN **MULTI COLOR**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF C 1500 71 830/840/850 ML IP65	●	47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML EM 3H IP65	●	47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML HF IP65	●	47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML HF EM 3H IP65	●	47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML DALI IP65	●	47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML DALI EM 3H IP65	●	47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010813	102.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010814	179.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010815	132.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	O	1010816	204.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	S	1010819	146.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	O	1010820	222.00

WATERPROOF

INDOOR

WATERPROOF P






MULTI LUMEN **MULTI COLOR**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF P 1200 65 830/840/850 ML IP65	●	37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML EM 3H IP65	●	37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML HF IP65	●	37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML HF EM 3H IP65	●	37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML DALI IP65	●	37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML DALI EM 3H IP65	●	37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010821	97.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010822	173.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010823	126.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	O	1010824	198.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	S	1010829	140.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	O	1010830	216.00

WATERPROOF

INDOOR

WATERPROOF P






MULTI LUMEN **MULTI COLOR**





Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF P 1500 81 830/840/850 ML IP65	●	46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML EM 3H IP65	●	46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML HF IP65	●	46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML HF EM 3H IP65	●	46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML DALI IP65	●	46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML DALI EM 3H IP65	●	46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010825	120.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010826	197.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010827	150.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	O	1010828	223.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	S	1010831	163.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	O	1010832	240.00

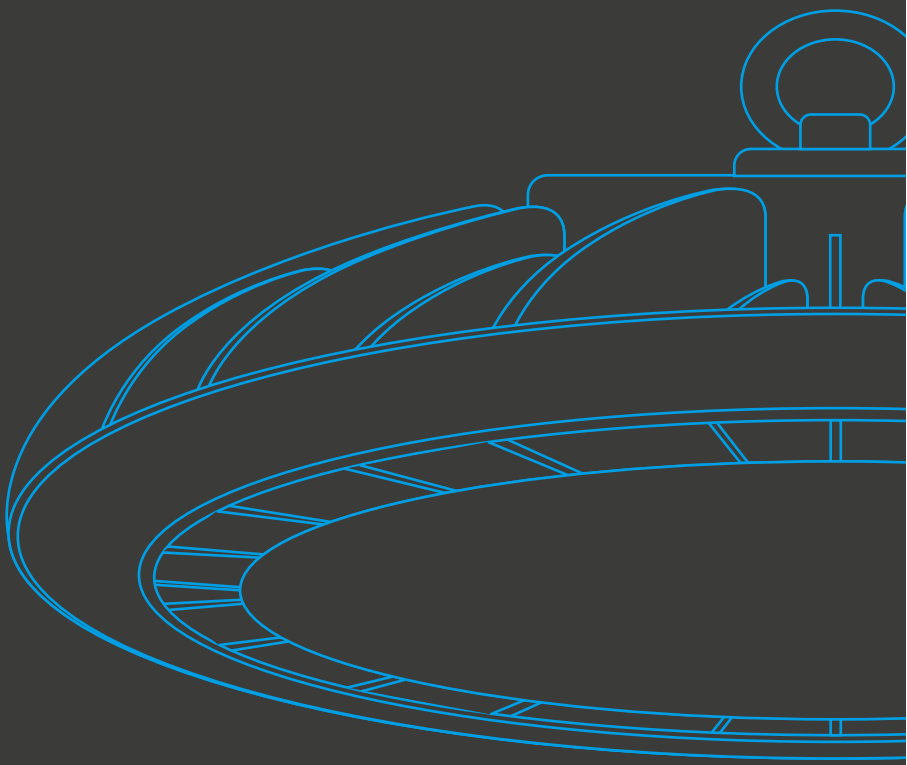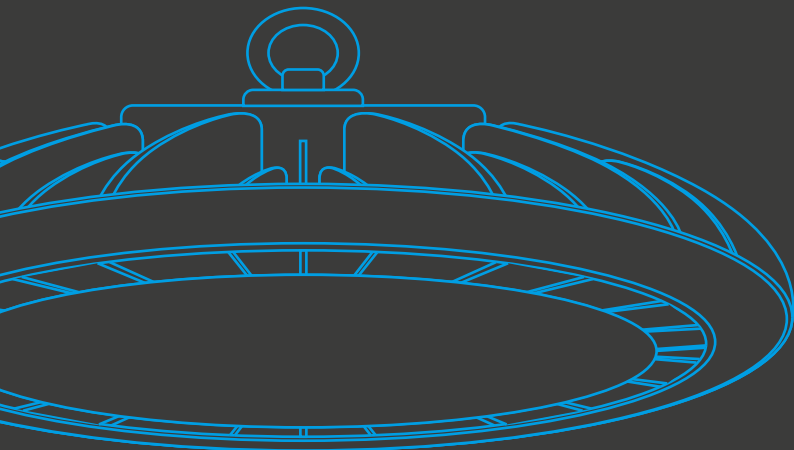

With suspension set
for HIGHBAY V



With reflector 100°



With mounting bracket

HIGHBAY

PRODUCT ADVANTAGES

Energy savings of up to 65% compared to conventional high-bay lights

Flexibly adjustable thanks to **Multi-Lumen**

Additional reflectors available to reduce glare

Optimised weight and size thanks to compact design

High-quality appearance and modern design

Ambient temperature: -40° to 40° Celsius

MULTI LUMEN



Intelligent
control
available

PRODUCT VARIANTS

	HIGHBAY V	HIGHBAY C
Service life	50.000h L80B50	70.000h L80B10
Energy efficiency	160 lm/W	175 lm/W
CRI	>80	>80
Control	On / Off	On / Off, DALI, Sensor, Casambi

HIGHBAY

INDOOR




HIGHBAY V



**MULTI
LUMEN**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
HIGHBAY V 330 840, 330, 100 / 120 / 170 / 200 W, 90°	●	200 W	220-240 V	32.000 lm	160 lm/W	4.000 K



CRI



Ambient temperature

Weight

Control

Emergency lighting

Availability*

Prod no.

EUR

50.000h
L80B50

>80

-

-40°C - 40°C

2,3 kg

On / Off

✗

S

1007679

235.00



Ø x H (mm):
435 x 130



Ø x L (mm):
19,2 x 1500



L x W x H (mm):
202,5 x 49,6 x 132

Product designation	Colour	Availability*	Prod no.	EUR
HIGHBAY V 330 Reflector 100°	●	S	1007677	50.00
HIGHBAY V Suspension kit 1500 mm	●	S	1007676	24.00
HIGHBAY V Connecting element 60° adjustable	●	S	1007678	24.00

HIGHBAY

INDOOR

HIGHBAY C



**MULTI
LUMEN**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
HIGHBAY C 340 60 / 80 / 100 W, 840	●	100 W	220-240 V	17.500 lm	175 lm/W	4.000 K
HIGHBAY C 400 120 / 160 / 200 W, 840	●	200 W	220-240 V	35.000 lm	175 lm/W	4.000 K
HIGHBAY C DALI 400 200 W, 840	●	200 W	220-240 V	35.000 lm	175 lm/W	4.000 K



Ø x H (mm):
413 x 176




Ø x H (mm):
480 x 185





L x W x H (mm):
250 x 40 x 33


Product designation	Colour	Availability*	Prod no.	EUR
HIGHBAY C 340 PC reflector	-	S	1008529	69.00
HIGHBAY C 400 PC reflector	-	S	1008530	89.00
HIGHBAY C U-bracket	●	S	1008528	14.50

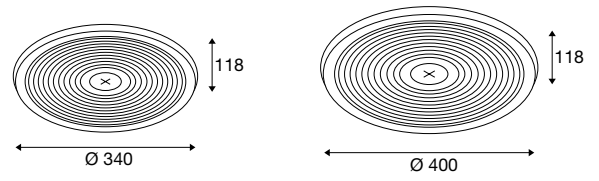*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
70.000h L80B10	>80	-	-30°C - 50°C	2,8 kg	On / Off	×	S	1008525	269.00
70.000h L80B10	>80	-	-30°C - 50°C	3,3 kg	On / Off	×	S	1008526	299.00
70.000h L80B10	>80	-	-30°C - 50°C	3,4 kg	DALI	×	S	1008527	349.00

Product designation	Colour	Availability*	Prod no.	EUR
HIGHBAY C CASAMBI module	○	S	1008576	129.00
HIGHBAY C Remote control	○	S	1008575	49.00
HIGHBAY C PIR sensor	○	S	1008532	49.00
HIGHBAY C HF sensor	○	S	1008531	49.00

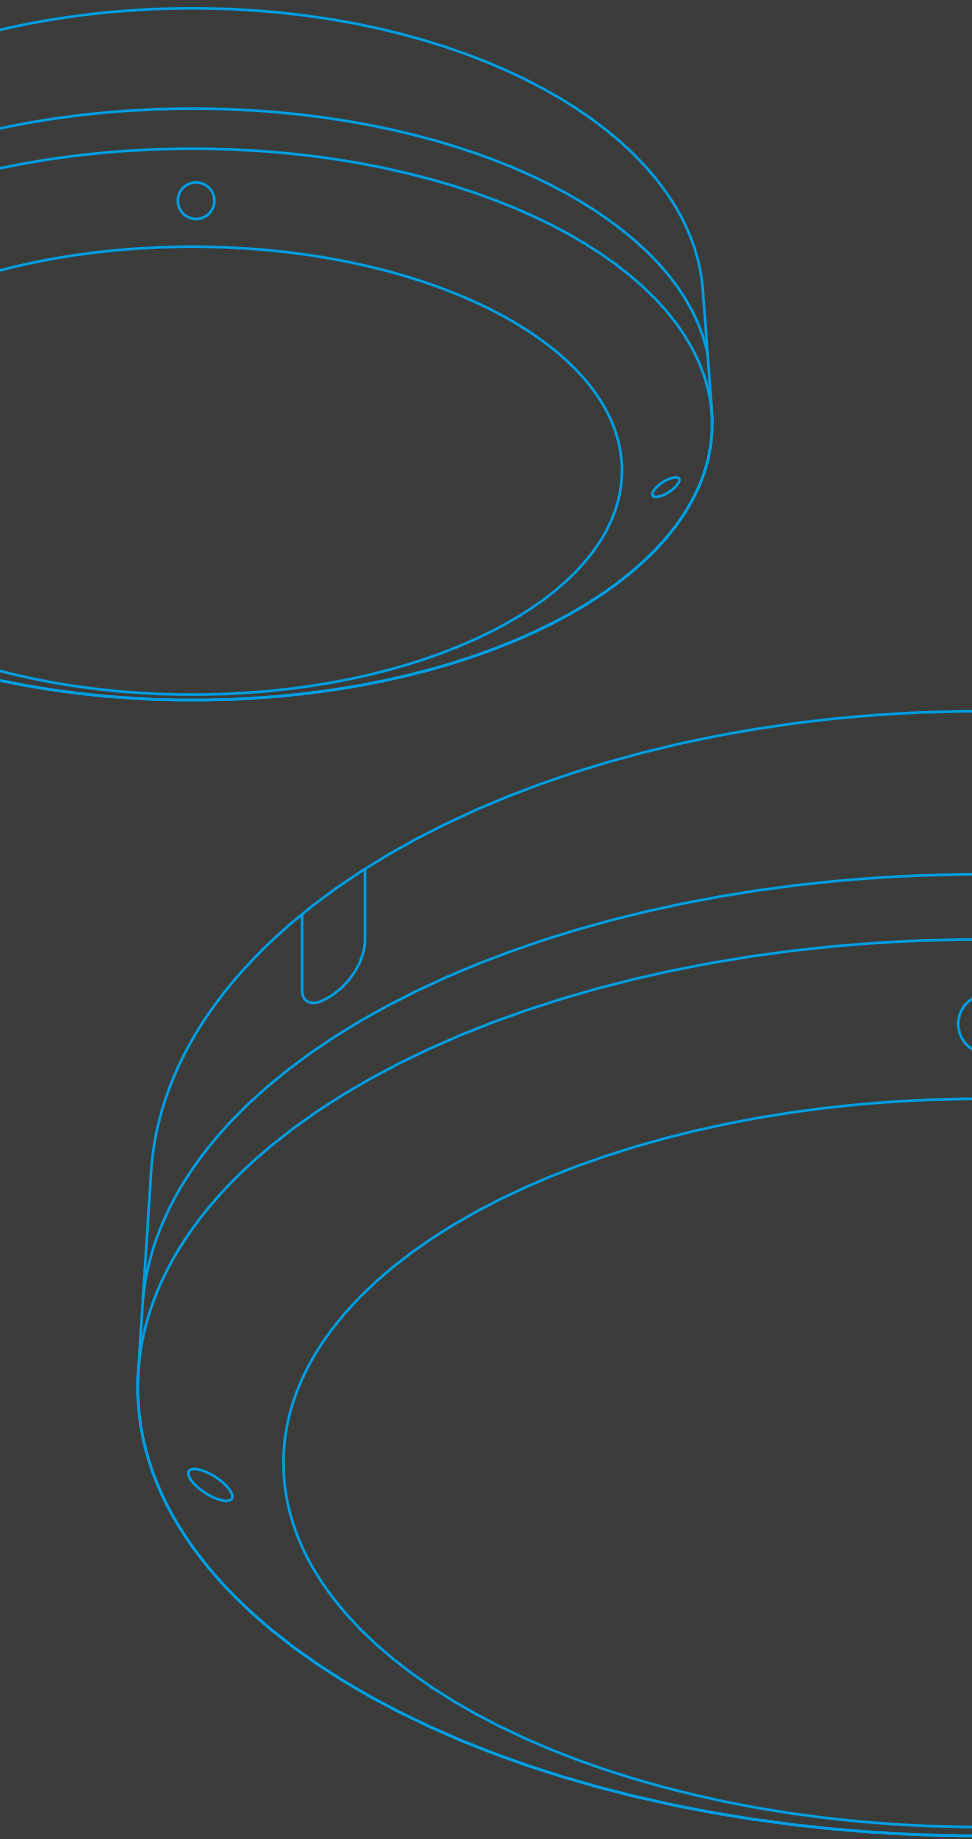

3.000 K



4.000 K



6.500 K

BULKHEAD

PRODUCT ADVANTAGES

Robust outdoor light with a high level of protection against vandalism thanks to **IK10**

Flexibly adjustable thanks to **Multi-Colour**

EASY TO INSTALL due to removable device carrier

High-quality light with homogeneous light emission

Energy savings of up to 55% compared to lights with compact fluorescent lamps (CFLs)

**MULTI
LUMEN** **MULTI
COLOR**



Robust
with IK10

BULKHEAD

OUTDOOR



OUTDOOR BULKHEAD V






MULTI
LUMEN **MULTI**
COLOR


IP65 IK10

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840 / 865, IP65, IK10, BK</i>	●	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840 / 865, IP65, IK10, WH</i>	○	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K
OUTDOOR BULKHEAD V 360 SENSOR <i>20 W, 830 / 840 / 865, IP65, IK10, BK, HF</i>	●	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K
OUTDOOR BULKHEAD V 360 SENSOR <i>20 W, 830 / 840 / 865, IP65, IK10, WH, HF</i>	○	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	EUR
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1007514	85.00
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1008833	85.00
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1007515	110.00
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1008901	110.00

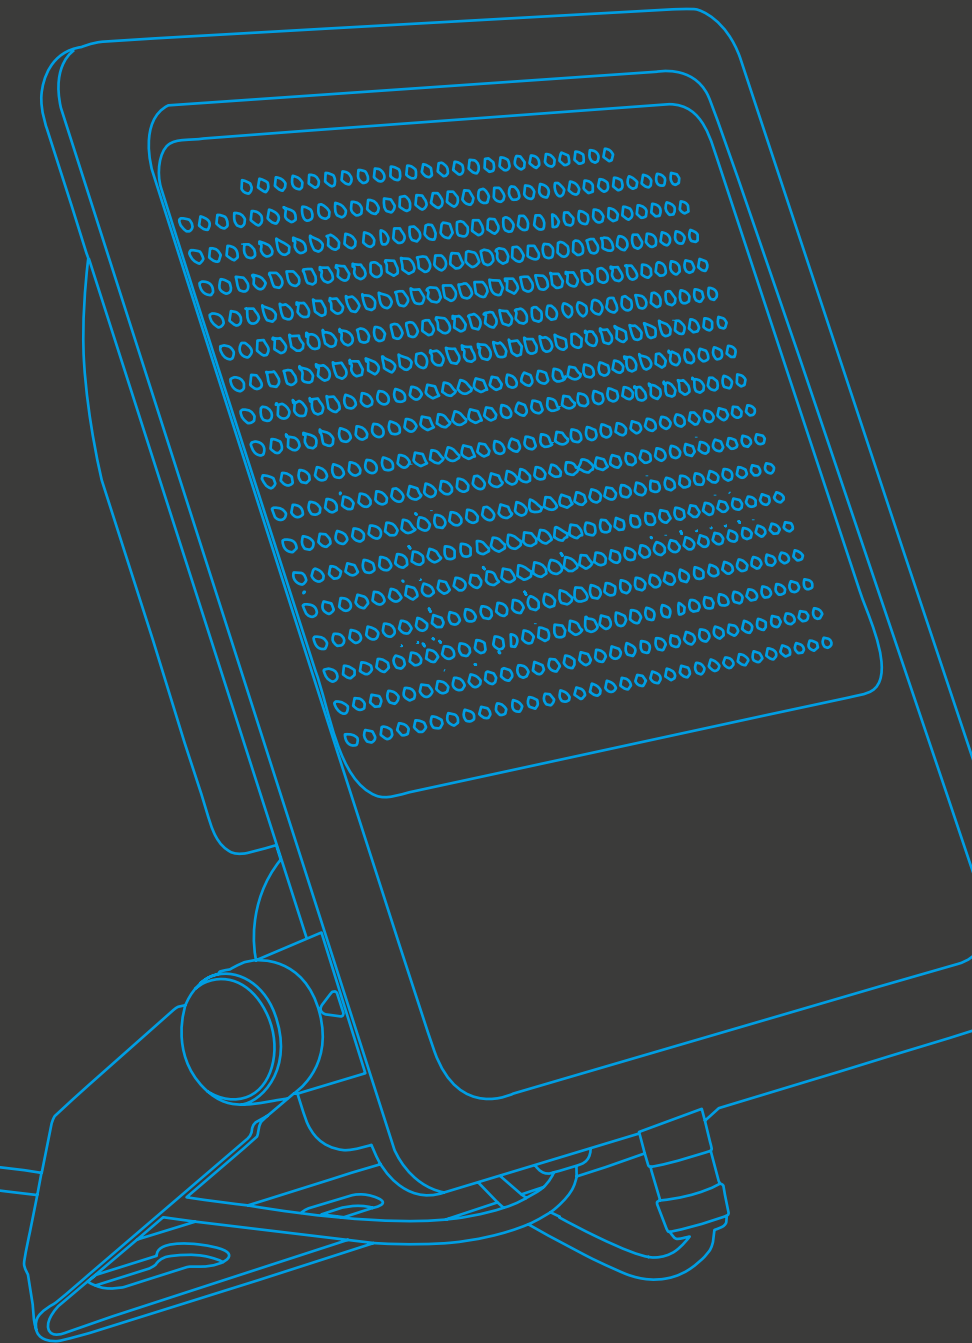

+



=



PIR sensor available separately

FLOODLIGHT

PRODUCT ADVANTAGES

Very high light output with **up to 32,400 lm** – Ideal for large outdoor areas such as car parks, logistics centres or sports facilities

High **efficiency of up to 170 lm/W** ensures maximum energy savings for high-output applications

Service life up to **80,000 hours**

Flexibly customisable thanks to **Multi-Lumen**

Asymmetrical light distribution for targeted illumination of large areas without light pollution

PIR sensor and remote control for **intelligent control** are available separately

Service life
80,000 hours

**MULTI
LUMEN**



FLOODLIGHT

OUTDOOR

FLOODLIGHT C




**MULTI
LUMEN**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
FLOODLIGHT C 50 / 75 / 100 W, 830, IP66	●	100 W	100-240 V	15.300 lm	160 lm/W	3.000 K
FLOODLIGHT C 50 / 75 / 100 W, 840, IP66	●	100 W	100-240 V	16.300 lm	169 lm/W	4.000 K
FLOODLIGHT C 100 / 150 / 200 W, 830, IP66	●	200 W	100-240 V	30.800 lm	163 lm/W	3.000 K
FLOODLIGHT C 100 / 150 / 200 W, 840, IP66	●	200 W	100-240 V	32.400 lm	170 lm/W	4.000 K

*S = in stock
O = to order

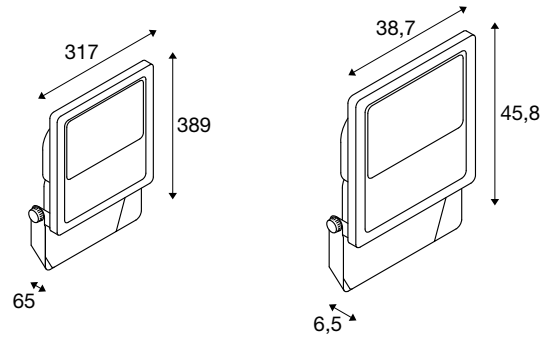

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	EUR
80.000h L80B10	>80	-	100°	-	180°	On / Off	×	S	1008907	359.00
80.000h L80B10	>80	-	100°	-	180°	On / Off	×	S	1008908	359.00
80.000h L80B10	>80	-	105°	-	180°	On / Off	×	S	1008909	459.00
80.000h L80B10	>80	-	105°	-	180°	On / Off	×	S	1008910	459.00



L x W x H (mm):
266 x 92 x 104



L x W x H (mm):
266 x 115 x 104



L x W x H (mm):
200 x 50 x 40



L x W x H (mm):
260 x 50 x 50




Ø x H (mm):
27,5 x 43




L x W x H (mm):
125 x 70 x 25

Product designation	Colour	Availability*	Prod no.	EUR
FLOODLIGHT C, Pole mount 60	●	S	1008911	115.00
FLOODLIGHT C, Pole mount 76	●	S	1008912	130.00
FLOODLIGHT C, Mounting bracket <i>small</i>	●	S	1008913	60.00
FLOODLIGHT C, Mounting bracket <i>large</i>	●	S	1008914	80.00
FLOODLIGHT C, PIR Sensor	○	S	1008915	90.00
FLOODLIGHT C, Remote control for PIR Sensor	●	S	1008916	70.00

COLOUR EXPLANATION



Black



White



Aluminium



Grey

EXPLANATION OF SYMBOLS



Protection classes:

- Protection class I/Protective conductor
- Protection class II/Protection by double or reinforced insulation



IP protection class



IK impact resistance rating



Half-diffusion angle:

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Pivoting capacity in degrees:



Through-wiring possible



Fire-retardant: developed and tested for use in certain fire-retardant suspended ceilings. Fire protection application (up to 90 minutes, tested with EN 1365-2:2014 'Fire resistance tests for load-bearing components – Part 2: Ceilings and roofs'). Outdoor use and fire protection applications (up to 90 minutes, BS476-20:1987 and BS476-21:1987)



Can be installed in insulation.

Can be covered with many types of thermal insulation materials.

MULTI **LUMEN**

The Multi-Lumen function allows you to gradually adjust the light intensity of the light so that you can customise the lighting to suit your needs.

MULTI **COLOR**

Multi-Colour describes the ability of a light to produce different light colours. For lights with adjustable Multi-Colour, the light colour can be adjusted using a switch.

Technically, several LED chips with different colours are installed. By changing the switch status, the proportion of the respective LEDs is adjusted to produce the desired light colour.

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions/information are therefore subject to change and errors excepted.

All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated in Euro without VAT.

Publisher
SLV GmbH, Germany
Daimlerstraße 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833-0
slv.com

Copyright
© SLV GmbH, 2025

The first part of the document discusses the importance of maintaining accurate records of all transactions and activities. It emphasizes that proper record-keeping is essential for ensuring transparency and accountability in financial operations. This section also outlines the various methods and tools used to collect and analyze data, highlighting the role of technology in streamlining these processes.

The second part of the document focuses on the implementation of internal controls and risk management strategies. It details how these measures are designed to prevent fraud, reduce errors, and protect the organization's assets. The text provides a comprehensive overview of the different types of risks faced by the organization and the specific controls put in place to mitigate them.


The third part of the document addresses the financial reporting and budgeting process. It explains how the organization's financial performance is monitored and reported to stakeholders, and how budgets are developed and managed to ensure the organization stays on track with its financial goals. This section also discusses the importance of regular financial reviews and adjustments.

The final part of the document provides a summary of the key findings and recommendations. It highlights the areas where the organization is performing well and identifies the key challenges and opportunities for improvement. The recommendations are designed to help the organization address these challenges and maximize its potential for success.

SOCIAL MEDIA

Stay in touch with us and up to date. Don't miss out on any news or trends. On Facebook, YouTube, Instagram, Pinterest, Twitter, Xing, and LinkedIn, you'll find interesting information, news, and lots of ideas on how you can expand your business with the world of the KS Licht brand.

Follow us now!

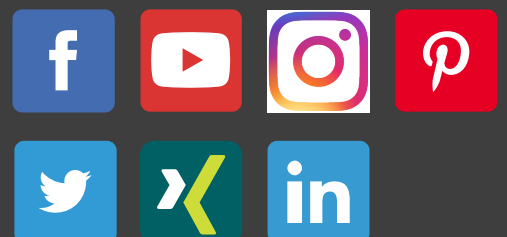

KS Licht- u. Elektrotechnik GmbH

Manderscheidtstr. 8c

45141 Essen

Tel.: +49 (0)201-89924-0

Fax: +49 (0)201-89924-124

Email: Verkauf@KS-Germany.com

Onlineshop: business.KS-Licht.de

Internet: www.KS-Germany.com