


Installation Steps

5-b Wattage setting

DALI

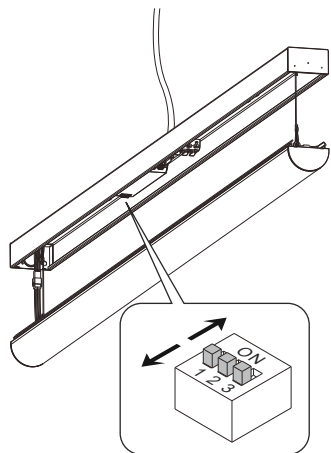

ON

1 2 3

1.2M

Article No.: 1009258, 1009259					
mA	1	2	3	Power (W)	
200	OFF	OFF	OFF	20	
250	ON	OFF	OFF	25	
325	OFF	OFF	ON	30	
375	OFF	ON	ON	35	

ON


1 2 3 4

1.5M


Article No.: 1009260, 1009261					
mA	1	2	3	4	Power (W)
200	OFF	ON	OFF	OFF	28
250	ON	ON	OFF	OFF	34
300	ON	OFF	ON	OFF	41
350	ON	ON	ON	OFF	48

6 Connecting Power Supply


3 Wires specification:

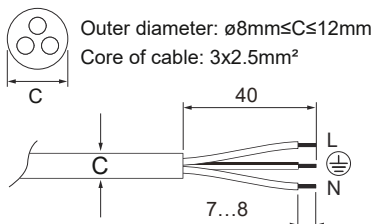

5 Wires specification:

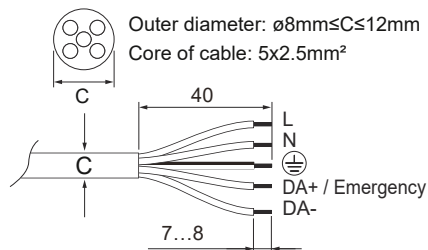

7 Assemble the housing

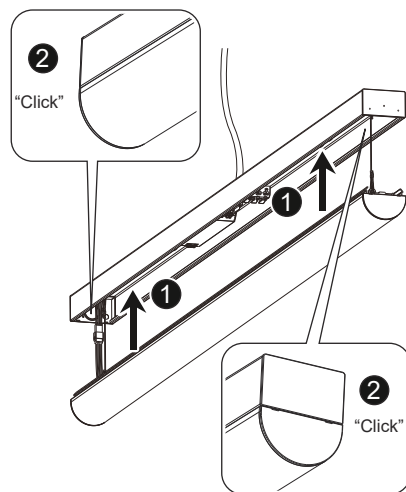

LED Batten P Installation Manual



IMPORTANT SAFETY NOTES




WARNING

RISK OF ELECTRIC SHOCK

BEFORE YOU BEGIN

- Read these instructions completely and carefully.
- The installation and connection of the luminaire must be done when switched off and by qualified people. Make sure no voltage while installation.



CAUTION


MAINTENANCE

- To avoid injuries, disconnect power to the light and allow the unit to cool down before performing maintenance.
- Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on an annual basis. Frequency of use and environment should determine this.
- The Covers should be cleaned periodically as needed to ensure continued photometric performance. Clean the Cover with a damp, non-abrasive, lintfree cloth. If not sufficient, use mild soap or a liquid cleaner. Do not use an abrasive, strong alkaline or acid cleaner as damage may occur.
- Inspect the topside on the luminaire to ensure that it is free of any obstructions or contamination (i.e.excessive dust build-up). Clean with a non-abrasive cloth if needed.



This product contains a light source of energy efficiency class D.

Products

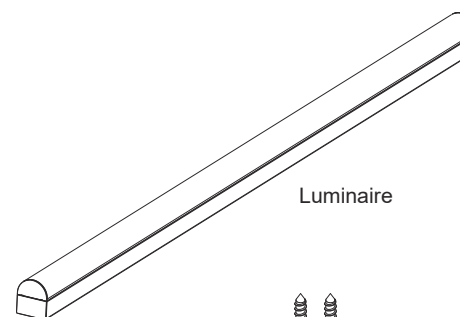

Luminaire




PA4x40mm



Expansion Tube

Optional


1009262



Steel cable suspension kits


Dimensions

[mm]

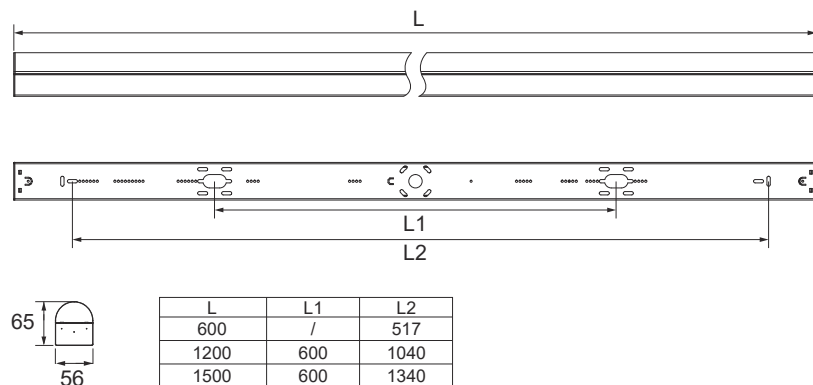


Installation Steps

- 1** Open the luminaire with a flat-head screwdriver

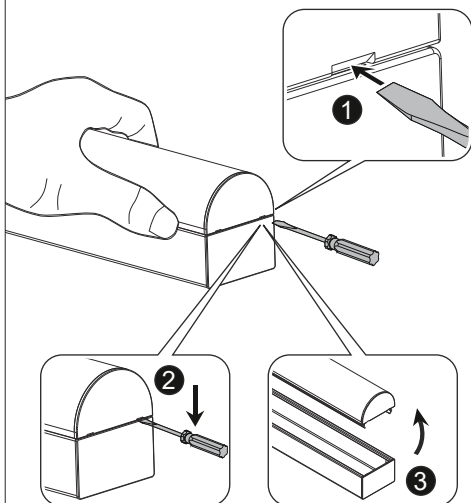


- 2** Thread the wire through the wire hole

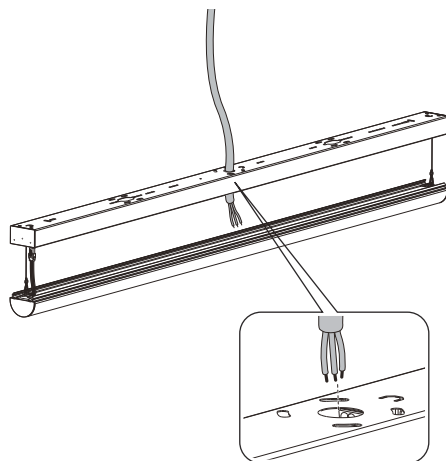


Installation Steps



- 3-a Surface mounted**

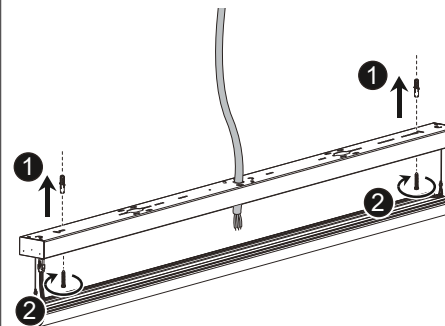

- 3-b Suspended mounted**

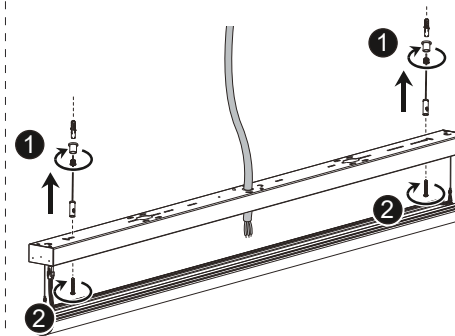

- 4** CCT Setting



- 5-a** Wattage setting
ON / OFF

mA	1	2	Power(W)		
			1009251	1009252 1009253 1009254	1009255 1009256 1009257
200	OFF	OFF	11	20	28
250	OFF	ON	14	25	34
300	ON	OFF	17	30	41
350	ON	ON	20	35	48

